


FSFV-PVC-T

Dichte der Flüssigkeit: 1kg/l 20 °C – Anschlüsse BSP GEWINDE
 Schwimmer: PP (Polypropylen) rot

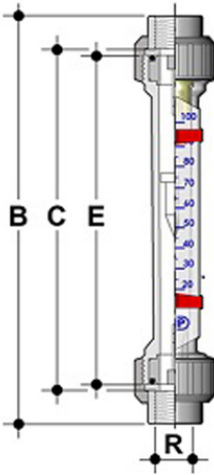

Artikel	product.detail.attribute.[["R"]
FSFV034T1M0150	3\4\[""]
FSFV034T1M0250	3\4\[""]
FSFV034T1M0450	3\4\[""]
FSFV034T1M0700	3\4\[""]
FSFV100T1M0250	1\[""]
FSFV100T1M0400	1\[""]
FSFV100T1M0650	1\[""]
FSFV100T1M1000	1\[""]
FSFV112T1M1600	1\1\2\["Flow rate range for H[5:2]O [l\h]", "150 - 1600"], ["B", "413"], ["C", "356"], ["E", "350"]
FSFV112T1M2200	1\1\2\["Flow rate range for H[5:2]O [l\h]", "200 - 2200"], ["B", "413"], ["C", "356"], ["E", "350"]
FSFV112T1M2500	1\1\2\["Flow rate range for H[5:2]O [l\h]", "250 - 2500"], ["B", "413"], ["C", "356"], ["E", "350"]
FSFV114T1M1000	1\1\4\["Flow rate range for H[5:2]O [l\h]", "100 - 1000"], ["B", "406"], ["C", "356"], ["E", "350"]
FSFV114T1M1600	1\1\4\["Flow rate range for H[5:2]O [l\h]", "160 - 1600"], ["B", "406"], ["C", "356"], ["E", "350"]
FSFV114T1M2500	1\1\4\["Flow rate range for H[5:2]O [l\h]", "200 - 2500"], ["B", "406"], ["C", "356"], ["E", "350"]
FSFV200T1M2500	2\[""]
FSFV200T1M3500	2\[""]
FSFV200T1M5000	2\[""]
FSFV212T1M0010	2\1\2\["Flow rate range for H[5:2]O [l\h]", "1000 - 10000"], ["B", "444"], ["C", "356"], ["E", "350"]
FSFV212T1M0025	2\1\2\["Flow rate range for H[5:2]O [l\h]", "5000 - 25000"], ["B", "444"], ["C", "356"], ["E", "350"]
FSFV212T1M8000	2\1\2\["Flow rate range for H[5:2]O [l\h]", "1000 - 8000"], ["B", "444"], ["C", "356"], ["E", "350"]