


FSFV-Trogamid

Dichte der Flüssigkeit: 1kg/l 20 °C – Anschlüsse BSP GEWINDE
 Schwimmer: Edelstahl AISI 316

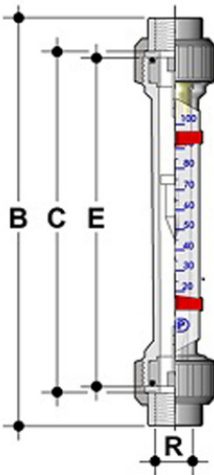

Artikel	product.detail.attribute.[["R"]]
FSFV034D1X0250	3\4\"]
FSFV034D1X0400	3\4\"]
FSFV034D1X0640	3\4\"]
FSFV034D1X1000	3\4\"]
FSFV100D1X0400	1\"]
FSFV100D1X0640	1\"]
FSFV100D1X1000	1\"]
FSFV100D1X1600	1\"]
FSFV112D1X2500	1\1\2\],[["Flow rate range for H[5:2]O [l\h]", "200-2500"],["B", "413"],["E", "350"],["C", "356"]]
FSFV112D1X4000	1\1\2\],[["Flow rate range for H[5:2]O [l\h]", "400-4000"],["B", "413"],["E", "350"],["C", "356"]]
FSFV112D1X5000	1\1\2\],[["Flow rate range for H[5:2]O [l\h]", "500-5000"],["B", "413"],["E", "350"],["C", "356"]]
FSFV114D1X1600	1\1\4\],[["Flow rate range for H[5:2]O [l\h]", "150-1600"],["B", "406"],["E", "350"],["C", "356"]]
FSFV114D1X2500	1\1\4\],[["Flow rate range for H[5:2]O [l\h]", "200-2500"],["B", "406"],["E", "350"],["C", "356"]]
FSFV114D1X4000	1\1\4\],[["Flow rate range for H[5:2]O [l\h]", "400-4000"],["B", "406"],["E", "350"],["C", "356"]]
FSFV200D1X0010	2\"]
FSFV200D1X4000	2\"]
FSFV200D1X6000	2\"]
FSFV212D1X0015	2\1\2\],[["Flow rate range for H[5:2]O [l\h]", "1500-15000"],["B", "444"],["E", "350"],["C", "356"]]
FSFV212D1X0020	2\1\2\],[["Flow rate range for H[5:2]O [l\h]", "2000-20000"],["B", "444"],["E", "350"],["C", "356"]]
FSFV212D1X0050	2\1\2\],[["Flow rate range for H[5:2]O [l\h]", "10000-50000"],["B", "444"],["E", "350"],["C", "356"]]