


FSFV-PVC-T

Dichte der Flüssigkeit: 1kg/l 20 °C – Anschlüsse BSP GEWINDE
 Schwimmer: Edelstahl AISI 316

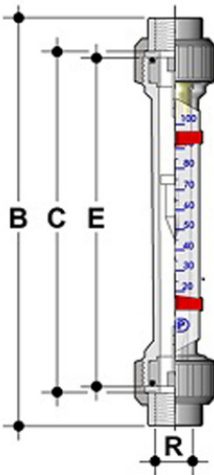

Artikel	product.detail.attribute.[["R"]
FSFV034T1X0250	3\4"
FSFV034T1X0400	3\4"
FSFV034T1X0640	3\4"
FSFV034T1X1000	3\4"
FSFV100T1X0400	1"
FSFV100T1X0640	1"
FSFV100T1X1000	1"
FSFV100T1X1600	1"
FSFV112T1X2500	1"1\2",["Flow rate range for H[5:2]O [l\h]", "200-2500"],["B", "413"],["E", "350"],["C", "356"]
FSFV112T1X4000	1"1\2",["Flow rate range for H[5:2]O [l\h]", "400-4000"],["B", "413"],["E", "350"],["C", "356"]
FSFV112T1X5000	1"1\2",["Flow rate range for H[5:2]O [l\h]", "500-5000"],["B", "413"],["E", "350"],["C", "356"]
FSFV114T1X1600	1"1\4",["Flow rate range for H[5:2]O [l\h]", "150-1600"],["B", "406"],["E", "350"],["C", "356"]
FSFV114T1X2500	1"1\4",["Flow rate range for H[5:2]O [l\h]", "200-2500"],["B", "406"],["E", "350"],["C", "356"]
FSFV114T1X4000	1"1\4",["Flow rate range for H[5:2]O [l\h]", "400-4000"],["B", "406"],["E", "350"],["C", "356"]
FSFV200T1X0010	2"
FSFV200T1X4000	2"
FSFV200T1X6000	2"
FSFV212T1X0015	2"1\2",["Flow rate range for H[5:2]O [l\h]", "1500-15000"],["B", "444"],["E", "350"],["C", "356"]
FSFV212T1X0020	2"1\2",["Flow rate range for H[5:2]O [l\h]", "2000-20000"],["B", "444"],["E", "350"],["C", "356"]
FSFV212T1X0050	2"1\2",["Flow rate range for H[5:2]O [l\h]", "10000-50000"],["B", "444"],["E", "350"],["C", "356"]