


# FSFV-PVC-T

Dichte der Flüssigkeit: 1,53 kg/l - 20°C - Anschlüsse BSP GEWINDET  
 Schwimmer: PP (Polypropylen) rot

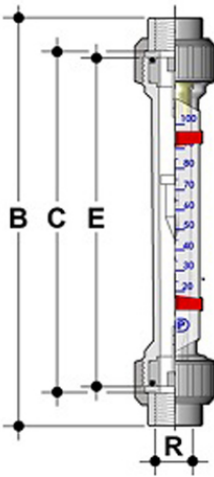

Artikel	product.detail.attribute.[["R"
FSFV034T5M0023	3\4\["]
FSFV034T5M0065	3\4\["]
FSFV034T5M0095	3\4\["]
FSFV034T5M0145	3\4\["]
FSFV100T5M0020	1\["]
FSFV100T5M0050	1\["]
FSFV100T5M0130	1\["]
FSFV100T5M0260	1\["]
FSFV112T5M0425	1\1\2\["Flow rate range for NaOH 50% [l\h]", "25 - 425"],["B", "413"],["E", "350"],["C", "356"]
FSFV112T5M0800	1\1\2\["Flow rate range for NaOH 50% [l\h]", "25 - 800"],["B", "413"],["E", "350"],["C", "356"]
FSFV112T5M0950	1\1\2\["Flow rate range for NaOH 50% [l\h]", "40 - 950"],["B", "413"],["E", "350"],["C", "356"]
FSFV114T5M0200	1\1\4\["Flow rate range for NaOH 50% [l\h]", "10 - 200"],["B", "406"],["E", "350"],["C", "356"]
FSFV114T5M0500	1\1\4\["Flow rate range for NaOH 50% [l\h]", "20 - 500"],["B", "406"],["E", "350"],["C", "356"]
FSFV114T5M0950	1\1\4\["Flow rate range for NaOH 50% [l\h]", "25 - 950"],["B", "406"],["E", "350"],["C", "356"]
FSFV200T5M0800	2\["]
FSFV200T5M1400	2\["]
FSFV200T5M2500	2\["]
FSFV212T5M0020	2\1\2\["Flow rate range for NaOH 50% [l\h]", "4100 - 20000"],["B", "444"],["E", "350"],["C", "356"]
FSFV212T5M3800	2\1\2\["Flow rate range for NaOH 50% [l\h]", "330 - 3800"],["B", "444"],["E", "350"],["C", "356"]
FSFV212T5M5200	2\1\2\["Flow rate range for NaOH 50% [l\h]", "170 - 5200"],["B", "444"],["E", "350"],["C", "356"]