


FSFV-PVC-T

Dichte der Flüssigkeit: 1,33 kg/l - 20°C - Anschlüsse BSP GEWINDET
 Schwimmer: Edelstahl AISI 316

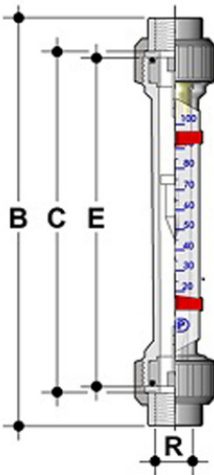

Artikel	product.detail.attribute.[["R"
FSFV034T3X0125	3\4"
FSFV034T3X0240	3\4"
FSFV034T3X0425	3\4"
FSFV034T3X0725	3\4"
FSFV100T3X0240	1"
FSFV100T3X0420	1"
FSFV100T3X0700	1"
FSFV100T3X1200	1"
FSFV112T3X1700	1\1\2",["Flow rate range for NaOH 30% [l\h]", "100 - 1700"],["B", "413"],["E", "350"],["C", "356"]]
FSFV112T3X3000	1\1\2",["Flow rate range for NaOH 30% [l\h]", "200 - 3000"],["B", "413"],["E", "350"],["C", "356"]]
FSFV112T3X3700	1\1\2",["Flow rate range for NaOH 30% [l\h]", "200 - 3700"],["B", "413"],["E", "350"],["C", "356"]]
FSFV114T3X1150	1\1\4",["Flow rate range for NaOH 30% [l\h]", "50 - 1150"],["B", "406"],["E", "350"],["C", "356"]]
FSFV114T3X1900	1\1\4",["Flow rate range for NaOH 30% [l\h]", "100 - 1900"],["B", "406"],["E", "350"],["C", "356"]]
FSFV114T3X3200	1\1\4",["Flow rate range for NaOH 30% [l\h]", "200 - 3200"],["B", "406"],["E", "350"],["C", "356"]]
FSFV200T3X3000	2"
FSFV200T3X4700	2"
FSFV200T3X8500	2"
FSFV212T3X0012	2\1\2",["Flow rate range for NaOH 30% [l\h]", "1000 - 12000"],["B", "444"],["E", "350"],["C", "356"]]
FSFV212T3X0043	2\1\2",["Flow rate range for NaOH 30% [l\h]", "8800 - 43000"],["B", "444"],["E", "350"],["C", "356"]]
FSFV212T3X0165	2\1\2",["Flow rate range for NaOH 30% [l\h]", "1500 - 16500"],["B", "444"],["E", "350"],["C", "356"]]