


FSFV-PVC-T

Dichte der Flüssigkeit: 1,53 kg/l - 20°C - Anschlüsse BSP GEWINDET
 Schwimmer: Edelstahl AISI 316

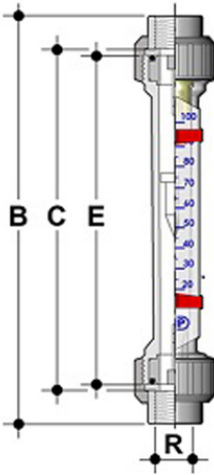

Artikel	product.detail.attribute.[["R"
FSFV034T5X0027	3\4"
FSFV034T5X0070	3\4"
FSFV034T5X0170	3\4"
FSFV034T5X0350	3\4"
FSFV100T5X0065	1"
FSFV100T5X0145	1"
FSFV100T5X0330	1"
FSFV100T5X0675	1"
FSFV112T5X1000	1\1\2",["Flow rate range for NaOH 50% [l\h]", "50 - 1000"],["B", "413"],["E", "350"],["C", "356"]
FSFV112T5X1900	1\1\2",["Flow rate range for NaOH 50% [l\h]", "50 - 1900"],["B", "413"],["E", "350"],["C", "356"]
FSFV112T5X2500	1\1\2",["Flow rate range for NaOH 50% [l\h]", "100 - 2500"],["B", "413"],["E", "350"],["C", "356"]
FSFV114T5X0550	1\1\4",["Flow rate range for NaOH 50% [l\h]", "25 - 550"],["B", "406"],["E", "350"],["C", "356"]
FSFV114T5X1100	1\1\4",["Flow rate range for NaOH 50% [l\h]", "50 - 1100"],["B", "406"],["E", "350"],["C", "356"]
FSFV114T5X2000	1\1\4",["Flow rate range for NaOH 50% [l\h]", "100 - 2000"],["B", "406"],["E", "350"],["C", "356"]
FSFV200T5X1800	2"
FSFV200T5X3100	2"
FSFV200T5X6000	2"
FSFV212T5X0040	2\1\2",["Flow rate range for NaOH 50% [l\h]", "8200 - 40000"],["B", "444"],["E", "350"],["C", "356"]
FSFV212T5X0125	2\1\2",["Flow rate range for NaOH 50% [l\h]", "500 - 12500"],["B", "444"],["E", "350"],["C", "356"]
FSFV212T5X9000	2\1\2",["Flow rate range for NaOH 50% [l\h]", "250 - 9000"],["B", "444"],["E", "350"],["C", "356"]