


FCIV-Polysulfon

Dichte der Flüssigkeit: 1,53 kg/l - 20°C - Klebeverbindungen der metrischen Serie
 Schwimmer: PP (Polypropylen) rot

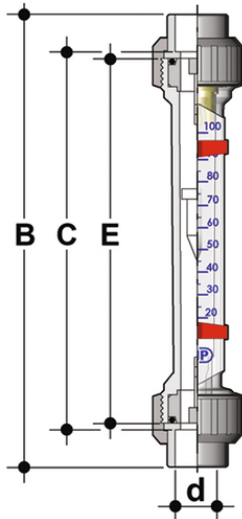

Artikel	d	product.detail.attribute.Flow rate range for NaOH 50% [l/h]	B	product.detail.attribute.E	product.detail.attribute.C	product.detail.attribute.[["d"
FCIV016P5M0005	16	0,025 - 0,5	199	165	171	-
FCIV016P5M0009	16	0,5 - 9	199	165	171	-
FCIV016P5M0021	16	1 - 21	199	165	171	-
FCIV016P5M0275	16	0,25 - 2,75	199	165	171	-
FCIV020P5M0002	20	0,1 - 2	208	170	176	-
FCIV020P5M0055	20	0,25 - 5,5	208	170	176	-
FCIV020P5M0125	-	-	-	-	-	20]
FCIV020P5M0255	20	2 - 25,5	208	170	176	-
FCIV020P5M0475	20	2,5 - 47,5	208	170	176	-
FCIV025P5M0010	25	1 - 10	229	185	191	-
FCIV025P5M0019	25	1 - 19	229	185	191	-
FCIV025P5M0045	25	2 - 45	229	185	191	-
FCIV025P5M0130	25	4 - 130	229	185	191	-
FCIV032P5M0015	32	1 - 15	250	200	206	-
FCIV032P5M0040	32	2 - 40	250	200	206	-
FCIV032P5M0110	32	5 - 110	250	200	206	-
FCIV032P5M0260	32	10 - 260	250	200	206	-