
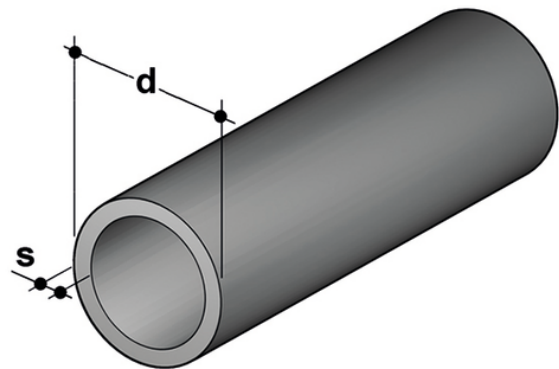


TemperFIP100® Druckrohr PN16

SDR 13,6 – S6,3

TemperFIP100® Druckschlauch

Corzan® C-PVC Druckschlauch nach EN ISO 15493 und DIN 8079/8080, lichtgrau RAL 7040, Standardlänge 5m.

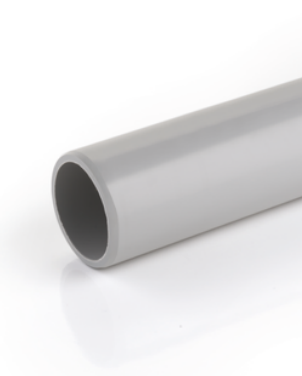

Artikel	d	DN	product.detail.attribute.S mm	product.detail.attribute.kg/m	product.detail.attribute.[["d"
PIPEC13016	16	10	1,4	0,110	-
PIPEC13020	20	15	1,5	0,170	-
PIPEC13025	25	20	1,9	0,260	-
PIPEC13032	32	25	2,4	0,420	-
PIPEC13040	40	32	3,0	0,630	-
PIPEC13050	50	40	3,7	0,970	-
PIPEC13063	63	50	4,7	1,530	-
PIPEC13075	-	-	-	-	75]
PIPEC13090	90	80	6,7	2,880	-
PIPEC13110	110	100	8,1	4,310	-
PIPEC13160	160	150	11,8	9,040	-