


TRBM PN6 SDR 17,6 - S 8,3 - Untersetzung

Ti 90° kurzer Zapfen zum Stumpfschweißen PN6 SDR 17,6 - S 8,3.

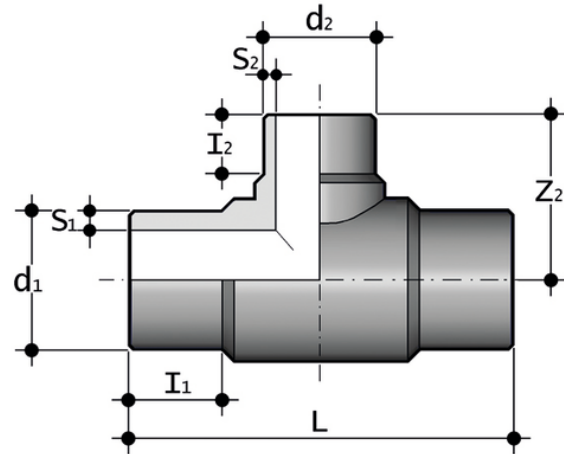

Artikel	product.detail.attribute.d[5:1]	product.detail.attribute.d[5:2]	product.detail.attribute.i[5:1]	product.detail.attribute.l[5:2]	L
TRBM17063050	*63	50	63	56	220
TRBM17075050	*75	50	70	55	250
TRBM17075063	*75	63	70	63	260
TRBM17090063	*90	63	79	63	270
TRBM17090075	*90	75	74	70	270
TRBM17110063	-	-	-	-	-
TRBM17110075	*110	75	82	70	315
TRBM17110090	*110	90	82	79	315
TRBM17125063	*125	63	70	31	270
TRBM17125110	*125	110	87	82	340
TRBM17140063	140	63	86	32	300
TRBM17140075	140	75	86	35	300
TRBM17140090	140	90	86	42	300
TRBM17140110	140	110	50	53	300
TRBM17160063	*160	63	98	64	340
TRBM17160075	*160	75	98	75	340
TRBM17160090	*160	90	100	81	340
TRBM17160110	*160	110	98	85	400
TRBM17160125	160	125	62	48	315

TRBM PN6 SDR 17,6 - S 8,3 - Untersetzung

Artikel	product.detail.attribute.d[5:1]	product.detail.attribute.d[5:2]	product.detail.attribute.i[5:1]	product.detail.attribute.l[5:2]	L
TRBM17180063	180	63	130	32	35
TRBM17180075	180	75	120	31	36
TRBM17180090	*180	90	134	97	42
TRBM17180110	180	110	106	48	36
TRBM17180125	180	125	92	50	35
TRBM17200063	*200	63	134	80	55
TRBM17200090	*200	90	134	95	55
TRBM17200110	*200	110	134	103	56
TRBM17200125	*200	125	134	110	55
TRBM17200160	*200	160	134	114	55
TRBM17225075	*225	75	120	75	45
TRBM17225090	-	-	-	-	-
TRBM17225110	*225	110	120	86	44
TRBM17225125	225	125	140	45	44
TRBM17225160	*225	160	120	98	49
TRBM17225180	*225	180	134	134	55