


NAMUR pilot valve "2EV"

PNEUMATICALLY ACTUATED VALVES

MAGNUM 3G is completed with a range of tools and accessories to help the installer

- Upper part (PVC-U)
 - Bottom part (PVC-U)
 - Bolts (zinc plated steel)
 - Nuts (zinc plated steel)
 - Gasket (NBR)
 - Reinforcing ring (Stainless steel)
- The reinforcing bush are used to reinforce the pipe PE100 (SDR11) e PE-X, to elong the lifetime of the pipeline and to reduce the collapse risk of the pipe in disadvantages conditions. They use is particularly suggested using PE-X pipes. The two tightening keys (d.16-63 and d.75-110) are important tools to install the **MAGNUM 3G** fittings

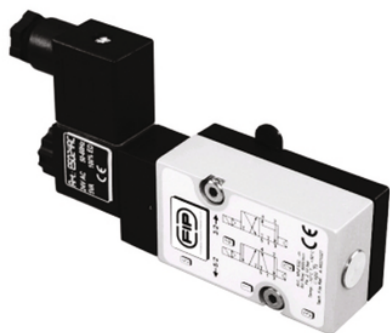

Reference	To be used with:	Voltage
2EV024AC	VKD, VXE, TKD, FE, FK	24V AC
2EV024DC	VKD, VXE, TKD, FE, FK	24V DC
2EV110AC	VKD, VXE, TKD, FE, FK	110V AC

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations