


# NAMUR pilot valve "2EV"

## PNEUMATICALLY ACTUATED DIAPHRAGM VALVES

**MAGNUM 3G** is completed with a range of tools and accessories to help the installer

- Upper part (PVC-U)
  - Bottom part (PVC-U)
  - Bolts (zinc plated steel)
  - Nuts (zinc plated steel)
  - Gasket (NBR)
  - Reinforcing ring (Stainless steel)
- The reinforcing bush are used to reinforce the pipe PE100 (SDR11) e PE-X, to elong the lifetime of the pipeline and to reduce the collapse risk of the pipe in disadvantages conditions. They use is particularly suggested using PE-X pipes. The two tightening keys (d.16-63 and d.75-110) are important tools to install the **MAGNUM 3G** fittings

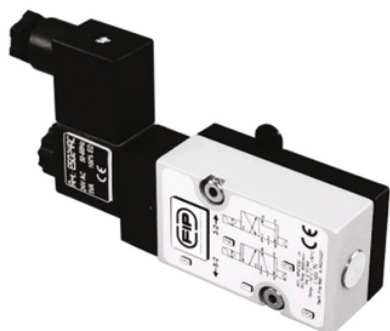

Reference	To be used with:	Voltage
2EV024AC	DK/CP - DKP/CP	24V AC 50 Hz
2EV024DC	DK/CP - DKP/CP	24V DC
2EV110AC	DK/CP - DKP/CP	110V AC 50 Hz
2EV220AC	DK/CP - DKP/CP	220V AC 50 Hz

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations