


FROF – Clapet valve DN 32:400

Clapet valve in PVDF without spring, ISO-DIN series.

The FR type swing check valve is designed to be directly installed between stubs and flanges according to ISO/DIN or ANSI 150 standards.

- Installed with FIP QPV (d50 – d160) stubs and QRV stubs using flat gasket QHV/Y (d225 – d315), on PVC piping class PN10 or lower with type ODV flanges
- **Metal support for easy and precise centring** of the valve during installation
- Can be installed in either a vertical or horizontal position
- **Sealing system with O-ring** for optimum sealing and installation without flat gaskets

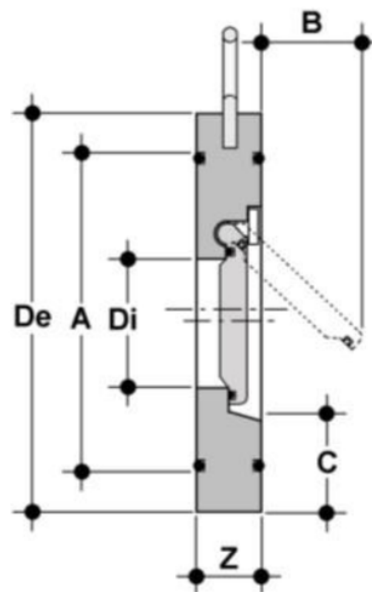

EPDM

Reference	d	DN	PN	ISO/DIN	Z	Di	A	B	C	g
FROF040E	40	32	10	85	15	18	59	22	25	160
FROF050E	50	40	10	95	16	22	72	25	28	210
FROF063E	63	50	10	109	18	32	86	37	29	340
FROF075E	75	65	10	129	20	40	105	50	31	430
FROF090E	90	80	10	144	20	54	119	61	32	520
FROF110E	110	100	10	164	23	70	146	77	31	720
FROF140E	140	125	10	195	23	92	173	94	35	980
FROF160E	160	150	8	220	26	105	197	100	40	1440
FROF225E	225	200	8	275	34	154	255	152	38	2730
FROF280E	280	250	5	330	40	192	312	180	41	4560
FROF315E	315	300	5	380	45	227	363	215	41	6950
FROF355E	350	350	5	440	49	266	416	245	44	10131

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations



FROF - Clapet valve DN 32:400

Reference	d	DN	PN	ISO/DIN	Z	Di	A	B	C	g
FROF400E	400	400	5	491	65	310	467	285	50	16736

FKM

Reference	d	DN	PN	ISO/DIN	Z	Di	A	B	C	g
FROF040F	40	32	10	85	15	18	59	22	25	160
FROF050F	50	40	10	95	16	22	72	25	28	210
FROF063F	63	50	10	109	18	32	86	37	29	340
FROF075F	75	65	10	129	20	40	105	50	31	430
FROF090F	90	80	10	144	20	54	119	61	32	520
FROF110F	110	100	10	164	23	70	146	77	31	720
FROF140F	140	125	10	195	23	92	173	94	35	980
FROF160F	160	150	8	220	26	105	197	100	40	1440
FROF225F	225	200	8	275	34	154	255	152	38	2730
FROF280F	280	250	5	330	40	192	312	180	41	4560
FROF315F	315	300	5	380	45	227	363	215	41	6950
FROF355F	350	350	5	440	49	266	416	245	44	10131
FROF400F	400	400	5	491	65	310	467	285	50	16736

PTFE

Reference	d	DN	PN	ISO/DIN	Z	Di	A	B	C	g
FROF040P	40	32	10	85	15	18	59	22	25	160
FROF050P	50	40	10	95	16	22	72	25	28	210
FROF063P	63	50	10	109	18	32	86	37	29	340
FROF075P	75	65	10	129	20	40	105	50	31	430
FROF090P	90	80	10	144	20	54	119	61	32	520
FROF110P	110	100	10	164	23	70	146	77	31	720
FROF140P	140	125	10	195	23	92	173	94	35	980
FROF160P	160	150	8	220	26	105	197	100	40	1440
FROF225P	225	200	8	275	34	154	255	152	38	2730
FROF280P	280	250	5	330	40	192	312	180	41	4560
FROF315P	315	300	5	380	45	227	363	215	41	6950
FROF355P	350	350	5	440	49	266	416	245	44	10131
FROF400P	400	400	5	491	65	310	467	285	50	16736

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

