


FROF/C4 - Clapet valve with Hastelloy C4 spring DN 32:400

Clapet valve in PVDF with Hastelloy spring, ISO-DIN series.

The FR type swing check valve is designed to be directly installed between stubs and flanges according to ISO/DIN or ANSI 150 standards.

- Installed with FIP QPV (d50 - d160) stubs and QRV stubs using flat gasket QHV/Y (d225 - d315), on PVC piping class PN10 or lower with type ODV flanges
- **Metal support for easy and precise centring** of the valve during installation
- Can be installed in either a vertical or horizontal position
- **Sealing system with O-ring** for optimum sealing and installation without flat gaskets

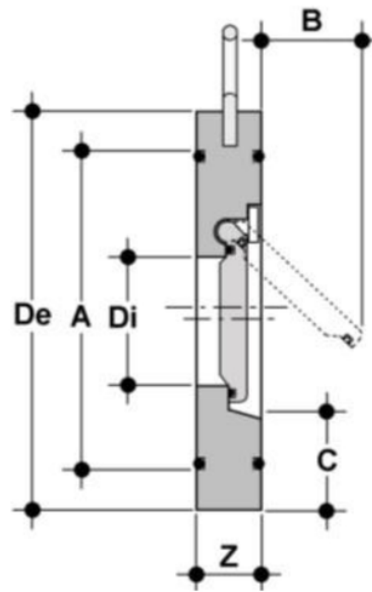

EPDM

Reference	d	DN	PN	ISO/DIN	Z	Di	A	B	C	g
FROF040EMLH	40	32	10	85	15	18	59	22	25	160
FROF050EMLH	50	40	10	95	16	22	72	25	28	210
FROF063EMLH	63	50	10	109	18	32	86	37	29	340
FROF075EMLH	75	65	10	129	20	40	105	50	31	430
FROF090EMLH	90	80	10	144	20	54	119	61	32	520
FROF110EMLH	110	100	10	164	23	70	146	77	31	720
FROF140EMLH	140	125	10	195	23	92	173	94	35	980
FROF160EMLH	160	150	8	220	26	105	197	100	40	1440
FROF225EMLH	225	200	8	275	34	154	255	152	38	2730
FROF280EMLH	280	250	5	330	40	192	312	180	41	4560
FROF315EMLH	315	300	5	380	45	227	363	215	41	6950
FROF355EMLH	350	350	5	440	49	266	416	245	44	10131

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations

FROF/C4 - Clapet valve with Hastelloy C4 spring DN 32:400

Reference	d	DN	PN	ISO/DIN	Z	Di	A	B	C	g
FROF400EMLH	400	400	5	491	65	310	467	285	50	16736

FKM

Reference	d	DN	PN	ISO/DIN	Z	Di	A	B	C	g
FROF040FMLH	40	32	10	85	15	18	59	22	25	160
FROF050FMLH	50	40	10	95	16	22	72	25	28	210
FROF063FMLH	63	50	10	109	18	32	86	37	29	340
FROF075FMLH	75	65	10	129	20	40	105	50	31	430
FROF090FMLH	90	80	10	144	20	54	119	61	32	520
FROF110FMLH	110	100	10	164	23	70	146	77	31	720
FROF140FMLH	140	125	10	195	23	92	173	94	35	980
FROF160FMLH	160	150	8	220	26	105	197	100	40	1440
FROF225FMLH	225	200	8	275	34	154	255	152	38	2730
FROF280FMLH	280	250	5	330	40	192	312	180	41	4560
FROF315FMLH	315	300	5	380	45	227	363	215	41	6950
FROF355FMLH	350	350	5	440	49	266	416	245	44	10131
FROF400FMLH	400	400	5	491	65	310	467	285	50	16736

PTFE

Reference	d	DN	PN	ISO/DIN	Z	Di	A	B	C	g
FROF040PMLH	40	32	10	85	15	18	59	22	25	160
FROF050PMLH	50	40	10	95	16	22	72	25	28	210
FROF063PMLH	63	50	10	109	18	32	86	37	29	340
FROF075PMLH	75	65	10	129	20	40	105	50	31	430
FROF090PMLH	90	80	10	144	20	54	119	61	32	520
FROF110PMLH	110	100	10	164	23	70	146	77	31	720
FROF140PMLH	140	125	10	195	23	92	173	94	35	980
FROF160PMLH	160	150	8	220	26	105	197	100	40	1440
FROF225PMLH	225	200	8	275	34	154	255	152	38	2730
FROF280PMLH	280	250	5	330	40	192	312	180	41	4560
FROF315PMLH	315	300	5	380	45	227	363	215	41	6950
FROF355PMLH	350	350	5	440	49	266	416	245	44	10131
FROF400PMLH	400	400	5	491	65	310	467	285	50	16736

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations