


PE 11.94.511

Bend 90°, PE 100, SDR 11, short

- molded
- for heating element butt welding and IR welding
- GKE with 8 45° auxiliary markings for precise installation
- Continuous wall thickness
- R approx. 1 x de

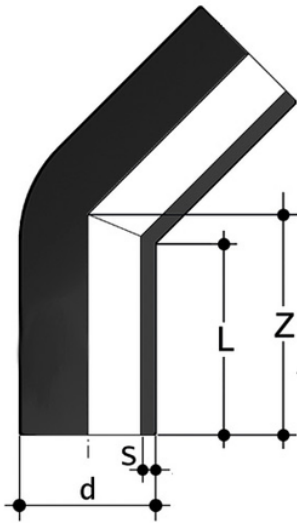

| Reference | d | Z | l | s | g |
|-----------|------|-----|-----|------|-------|
| HDE17050 | *50 | 76 | 61 | 3,0 | 84 |
| HDE17063 | *63 | 88 | 65 | 3,8 | 145 |
| HDE17075 | *75 | 90 | 71 | 4,5 | 200 |
| HDE17090 | *90 | 105 | 83 | 5,4 | 340 |
| HDE17110 | *110 | 121 | 91 | 6,6 | 575 |
| HDE17125 | *125 | 137 | 97 | 7,4 | 815 |
| HDE17140 | *140 | 168 | 120 | 8,3 | 1276 |
| HDE17160 | *160 | 190 | 142 | 9,5 | 1875 |
| HDE17180 | *180 | 196 | 141 | 10,7 | 2450 |
| HDE17200 | *200 | 207 | 152 | 11,9 | 3300 |
| HDE17225 | *225 | 210 | 153 | 13,4 | 4280 |
| HDE17250 | *250 | 220 | 133 | 14,8 | 5860 |
| HDE17280 | *280 | 227 | 142 | 16,6 | 7650 |
| HDE17315 | *315 | 250 | 154 | 18,7 | 10440 |

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations