


PE 11.94.511

Bend 90°, PE 100, SDR 11, short

- molded
- for heating element butt welding and IR welding
- GKE with 8 45° auxiliary markings for precise installation
- Continuous wall thickness
- R approx. 1 x de

Series of fittings designed for conveying fluids under pressure with a thread and weld connection system (butt welding).

- Size range: d 20 ÷ 63 (mm); R 1/2" ÷ 2"
- Nominal pressure: SDR 11 (PN16) with water at 20 °C
- Temperature range: -40 °C ÷ 60 °C
- Coupling standards - Reference standards:
 - Welding: EN ISO 15494. Can be coupled to pipes according to EN ISO 15494
 - Thread: ISO 228-1, DIN 2999
 - Construction criteria: EN ISO 15494
 - Test methods and requirements: EN ISO 15494
 - Installation criteria: DVS 2202-1, DVS 2207-1, UNI EN 12201- 3, UNI 10520, ISO 21307, UNI 10521, UNI EN 1555-3, ISO 4427- 3, ISO 4437-3
- Fitting material: PE-HD

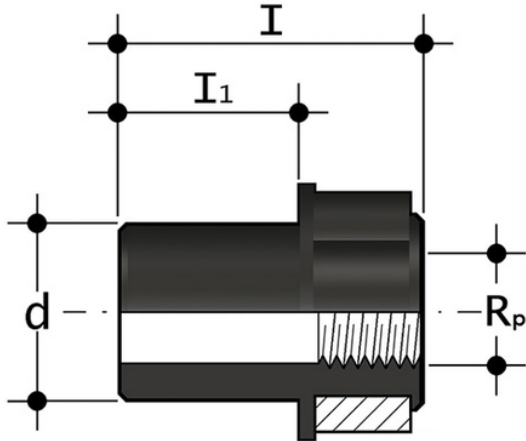

Reference	d	R _p	l	l ₁	g
DBME11020012	*20	1/2"	65	41	16
DBME11025012**	25	1/2"	37	16	16
DBME11025034	*25	3/4"	63	41	22
DBME11032100	*32	1"	71	44	41
DBME11040114	*40	1" 1/4	79	49	62
DBME11050112	*50	1" 1/2	88	55	82

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



PE 11.94.511

Bend 90°, PE 100, SDR 11, short

Reference	d	R _p	l	h ₁	g
DBME11063200	*63	2"	97	63	143

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

