


# Pressure pipe PN16 plain end NF-EN 1452

Pressure pipe PVC-U PN16 NF-EN 1452, Grey RAL 7011, length 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK® pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
  - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
  - **Coupling:** Forsheda 601 POWER-LOCK® Gasket
- **Reference standards**
  - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
  - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
  - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

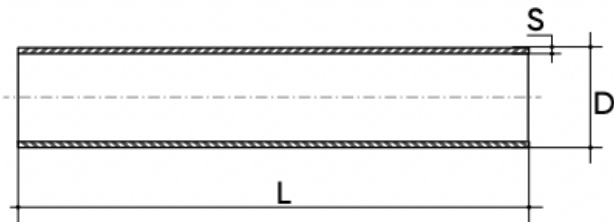

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV2103206L	32	1.6	0.24	449
PIPEV2104006L	40	1.9	0.36	275
PIPEV2105006L	50	2.4	0.56	194
PIPEV2106306L	63	3	0.89	123
PIPEV2107506L	75	3.6	1.24	87
PIPEV2109006L	90	4.3	1.78	96
PIPEV2111006L	110	5.3	2.67	57
PIPEV2112506L	125	6	3.41	51
PIPEV2114006L	140	6.7	4.33	45
PIPEV2116006L	160	7.7	5.67	33
PIPEV2118006L	180	8.6	7.32	28
PIPEV2120006L	200	9.6	8.81	20

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



# Pressure pipe PN16 plain end NF-EN 1452

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV2122506L	225	10.8	11.13	18
PIPEV2125006L	250	11.9	13.62	12
PIPEV2128006L	280	13.4	17.19	11
PIPEV2131506L	315	15.0	21.59	9
PIPEV2135506L	355	16.9	27.11	6
PIPEV2140006L	400	19.1	34.77	5

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

