


Pressure pipe PN16 plain end NF-EN 1452

PVC-U PN16 Pressure pipe plain end NF-EN 1452, Grey RAL 7011, length 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK[®] pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK[®] Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

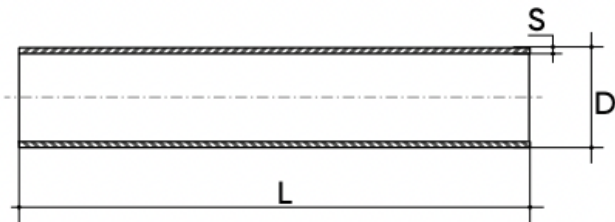

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV1303206L	32	2.4	0.35	449
PIPEV1304006L	40	3	0.54	275
pipev1305006L	50	3.7	0.83	194
PIPEV1306306L	63	4.7	1.31	123
PIPEV1307506L	75	5.6	1.86	87
PIPEV1309006L	90	6.7	2.66	96
PIPEV1311006L	110	8.1	3.94	57
PIPEV1312506L	125	9.2	5.07	51
PIPEV1714006L	140	9.3	5.86	45
PIPEV1716006L	160	9.5	6.89	33
PIPEV1720006L	200	11.9	10.75	20
PIPEV1722506L	225	13.4	13.63	18

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



Pressure pipe PN16 plain end NF-EN 1452

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV1725006L	250	14.8	16.70	12
PIPEV1731506L	315	18.7	26.49	9
PIPEV2135506L	355	16.9	27.11	6
PIPEV2140006L	400	19.1	34.77	5

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

