


Pressure pipe PN16 plain end DIN-8061-62

PVC-U PN16 DIN-8061-62 pressure pipe, Grey RAL 7011, length 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK[®] pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK[®] Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

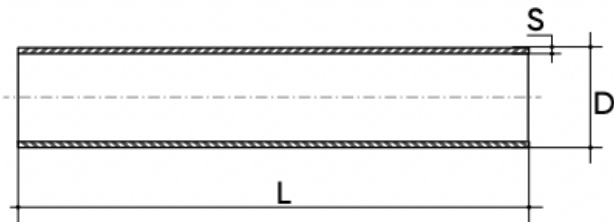

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV1302006L	20	1.5	0.14	1166
PIPEV1302506L	25	1.9	0.216	757
PIPEV1303206L	32	2.4	0.35	449
PIPEV1304006L	40	3	0.54	275
PIPEV1305006L	50	3.7	0.83	194
PIPEV1306306L	63	4.7	1.31	123
PIPEV1307506L	75	5.6	1.86	87
PIPEV1309006L	90	6.7	2.66	96
PIPEV1311006L	110	8.1	3.94	57
PIPEV1312506L	125	9.2	5.07	51
PIPEV1314006L	140	10.3	6.43	45
PIPEV1316006L	160	11.8	8.40	33

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



Pressure pipe PN16 plain end DIN-8061-62

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV1320006L	200	14.7	13.06	20
PIPEV1322506L	225	16.6	16.53	18
PIPEV1325006L	250	18.4	20.37	12

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations

