


Pressure pipe PN16 solvent socket DIN-8061-62

PVC-U PN16 Pressure pipe solvent socket DIN-8061-62, Grey RAL 7011, length 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK[®] pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK[®] Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

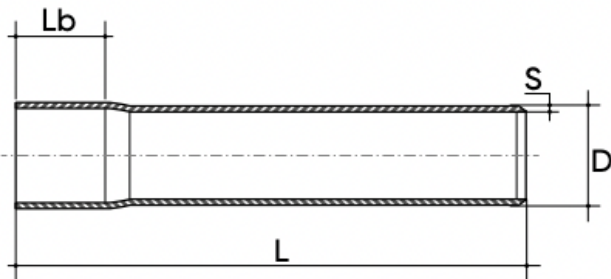

Reference	D (mm)	S (mm)	Lb (mm)	Weight (kg/m)	Qty x pallet
PIPEV13020I6L	20	1.5	37	0.14	1166
PIPEV13025I6L	25	1.9	40	0.216	757
PIPEV13032I6L	32	2.4	65	0.35	449
PIPEV13040I6L	40	3	70	0.54	275
PIPEV13050I6L	50	3.7	85	0.83	194
PIPEV13063I6L	63	4.7	90	1.31	123
PIPEV13075I6L	75	5.6	105	1.86	87
PIPEV13090I6L	90	6.7	130	2.66	96
PIPEV13110I6L	110	8.1	140	3.94	57
PIPEV13125I6L	125	9.2	150	5.07	51
PIPEV13140I6L	140	10.3	165	6.43	45
PIPEV13160I6L	160	11.8	175	8.40	33
PIPEV13200I6L	200	14.7	200	13.06	20

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



Pressure pipe PN16 solvent socket DIN-8061-62

Reference	D (mm)	S (mm)	Lb (mm)	Weight (kg/m)	Qty x pallet
PIPEV13225I6L	225	16.6	215	16.53	18
PIPEV13250I6L	250	18.4	200	20.37	12

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

