


Pressure pipe PN16 DIN-8061-62 Forsheda

Pressure pipe PVC-U PN16 DIN-8061-62 FORSHEDA 601 POWER-LOCK[®], Grey RAL 7011, length 6m plus solvent socket.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK[®] pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK[®] Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

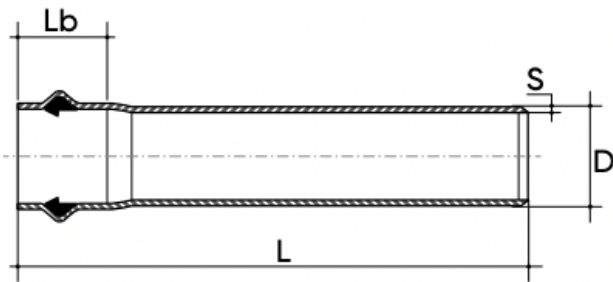

Reference	D (mm)	S (mm)	Lb (mm)	Weight (kg/m)	Qty x pallet
PIPEV13040S6L	40*	3	100	0.54	275
PIPEV13050S6L	50*	3.7	100	0,83	194
PIPEV13063F6L	63	4.7	110	1.31	123
PIPEV13075F6L	75	5.6	120	1.86	87
PIPEV13090F6L	90	6.7	130	2.66	96
PIPEV13110F6L	110	8.1	130	3.94	57
PIPEV13125F6L	125	9.2	150	5.07	51
PIPEV13140F6L	140	10.3	160	6.43	45
PIPEV13160F6L	160	11.8	165	8.40	33
PIPEV13200F6L	200	14.7	180	13.06	20
PIPEV13225F6L	225	16.6	200	16.53	18
PIPEV13250F6L	250	18.4	210	20.37	12

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations