


Pressure pipe PN25 plain end NF-EN 1452-2

PVC-U PN25 Pressure pipe plain end NF-EN 1452-2, Grey RAL 7011, length 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK® pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK® Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

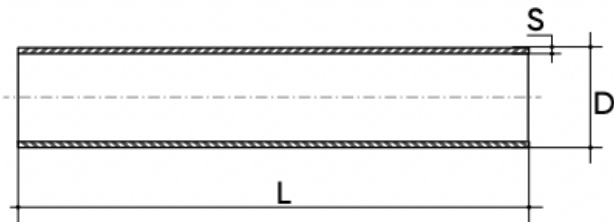

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEV0901606L	16	1.8	0.13	Bulk
PIPEV0902006L	20	2.3	0.2	1166
PIPEV0902506L	25	2.8	0.30	757
PIPEV0903206L	32	2.4	0.35	449
PIPEV0904006l	40	4.5	0.77	275
PIPEV0905006l	50	5.6*	1.19	194
PIPEV0906306L	63	7.1*	1.89	123

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations