


Pressure pipe PN12/CLASS D

Pressure pipe PVC-U PN12/CLASS D BS-EN 1452, BS 3505, Grey RAL 7011, length 6m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK[®] pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK[®] Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

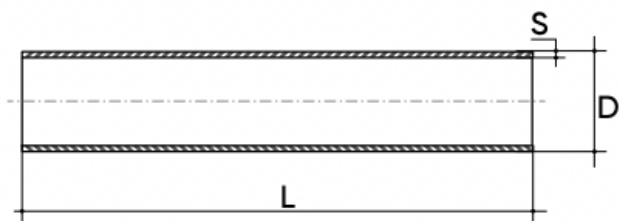

Reference	D (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEVBSD11406L	1" 1/4	2.2	0.44	292
PIPEVBSD11206L	1" 1/2	2.5	0.58	207
PIPEVBSD20006L	2"	3.1	0.88	252
PIPEVBSD30006L	3"	4.6	1.90	96
PIPEVBSD40006L	4"	6	3.17	67
PIPEVBSD60006L	6"	8.8	6.81	30
PIPEVBSD80006L	8"	10.3	10.36	18

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations