


PN10 Threadable Pressure pipe

PN10 Threadable PVC-U Pressure pipe, grey RAL 7011, length 5m.

Pressure pipes for joint system by cold chemical welding (gluing through the use of suitable WELD-ON adhesive and detergent primer) or FORSHEDA 601 POWERLOCK® pre-inserted and locked gasket joint.

Lareter rigid PVC pipes for pressure pipes are guaranteed by the certifications issued by IIP, CSTB, DVGW, WRAS and IMO.

- **Size range:** d 16 - d 500 (mm)
- **Nominal pressure:** PN 6-10-12,5-16-20-25 with water at 20° C
- **Temperature range:** 0 °C ÷ 60 °C
- **Coupling standards**
 - **Solvent welding:** EN ISO 15493, EN ISO 1452, DIN 8061/2.
 - **Coupling:** Forsheda 601 POWER-LOCK® Gasket
- **Reference standards**
 - **Construction criteria:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Test methods and requirements:** EN ISO 15493, EN ISO 1452, DIN 8061/2
 - **Installation criteria:** DVS 2204, DVS 2221, UNI 11242, EN ISO 1452, DIN 8061/2
- **Pipe material:** PVC-U dark grey RAL 7011

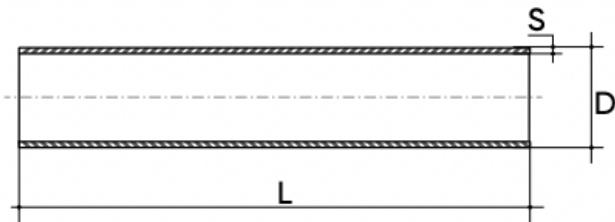

Reference	D (inches)	Øe (mm)	S (mm)	Weight (kg/m)	Qty x pallet
PIPEVT10012TOL	1/2"	21.2	2.6	0.232	1103
PIPEVT10034TOL	3/4"	26.6	2.6	0.3	664
PIPEVT10100TOL	1"	33.4	3.3	0.481	436
PIPEVT10112TOL	1" 1/2	48.1	4	0.852	207
PIPEVT10114TOL	1" 1/4	42.1	3.7	0.686	292
PIPEVT10200TOL	2"	60.2	4.6	1.238	252
PIPEVT0212TOL	2" 1/2	75	5.3	1.795	87
PIPEVT10300TOL	3"	88.7	6	2.386	96
PIPEVT10400TOL	4"	114.1	7	3,809	67

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations