


# POWER-LOCK bend 11° M/F PN16

Bend PVC-U, M/F, Grey RAL 7011, FORSHEDA 601 POWER-LOCK® connection.

The fittings comply with UNI EN ISO 1452, DIN 8063, ISO 2045, ISO/DIS 6455 standards for the transport of pressurised fluids for the supply of drinking water, wastewater and food fluids: oil, wine, milk.

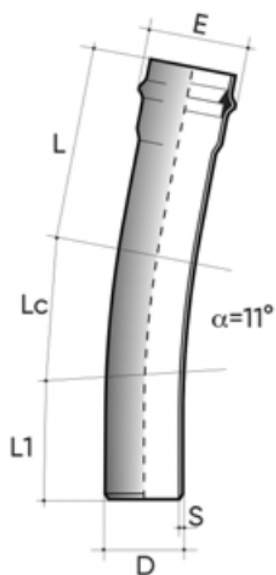

Reference	D (mm)	E (mm)	L (mm)	Lc (mm)	L1 (mm)	Weight (gr)
PBVPN16063F1L	63	86	350	280	275	1180
PBVPN16075F1L	75	102	280	280	355	1690
PBVPN16090F1L	90	120	320	340	300	2630
PBVPN16110F1L	110	144	315	295	300	2930
PBVPN16125F1L	125	161	350	340	285	4110
PBVPN16140F1L	140	178	330	375	315	5610
PBVPN16160F1L	160	202	330	435	345	7800
PBVPN16180S1L	180*	224	420	280	400	10670
PBVPN16200F1L	200	238	430	280	390	13710
PBVPN16225F1L	225	276	470	310	320	20160
PBVPN16250F1L	250	305	520	310	380	24700
PBVPN16280F1L	280	341	480	340	480	33070
PBVPN16315F1L	315	382	480	370	450	41880
PBVPN16400F1L	400	465	610	450	640	85590

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations