


POWER-LOCK bend 22° M/F PN10

Bend PVC-U, M/F, Grey RAL 7011, FORSHEDA 601 POWER-LOCK® connection.

The fittings comply with UNI EN ISO 1452, DIN 8063, ISO 2045, ISO/DIS 6455 standards for the transport of pressurised fluids for the supply of drinking water, wastewater and food fluids: oil, wine, milk.

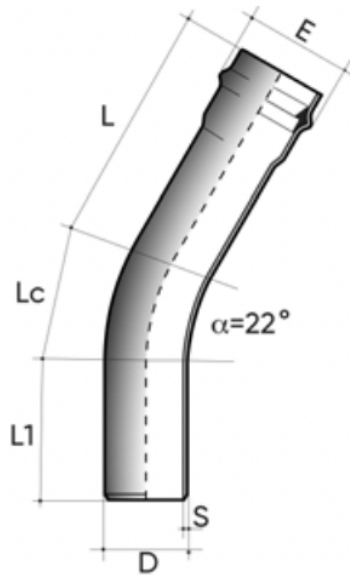

Reference	D (mm)	E (mm)	L (mm)	Lc (mm)	L1 (mm)	Weight (gr)
PBVPN10063F2L	63	86	350	280	270	790
PBVPN10075F2L	75	102	280	280	355	1120
PBVPN10090F2L	90	120	320	340	300	1740
PBVPN10110F2L	110	144	315	295	300	1930
PBVPN10125F2L	125	161	350	340	285	2690
PBVPN10140F2L	140	178	330	375	315	3610
PBVPN10160F2L	160	202	330	435	345	5030
PBVPN10180S2L	180*	224	460	330	410	7070
PBVPN10200F2L	200	238	470	330	400	10950
PBVPN10225F2L	225	276	490	510	420	12840
PBVPN10250F2L	250	305	510	520	370	15900
PBVPN10280F2L	280	341	480	590	430	21240
PBVPN10315F2L	315	382	540	510	450	26950
PBVPN10400F2L	400	465	610	880	510	57580

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations