


# POWER-LOCK bend 30° M/F PN10

Bend PVC-U, M/F, Grey RAL 7011, FORSHEDA 601 POWER-LOCK® connection.

The fittings comply with UNI EN ISO 1452, DIN 8063, ISO 2045, ISO/DIS 6455 standards for the transport of pressurised fluids for the supply of drinking water, wastewater and food fluids: oil, wine, milk.

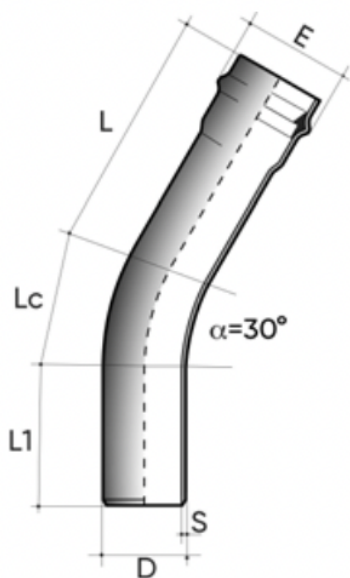

Reference	D (mm)	E (mm)	L (mm)	Lc (mm)	L1 (mm)	Weight (gr)
PBVPN10063F3L	63	86	350	280	275	790
PBVPN10075F3L	75	102	280	280	355	1120
PBVPN10090F3L	90	120	320	340	300	1740
PBVPN10110F3L	110	144	315	295	300	1930
PBVPN10125F3L	125	161	350	340	285	2690
PBVPN10140F3L	140	178	330	375	315	3610
PBVPN10160F3L	160	202	330	435	345	5030
PBVPN10180S3L	180*	224	460	680	310	7070
PBVPN10200F3L	200	238	475	680	295	10950
PBVPN10225F3L	225	276	490	840	270	12840
PBVPN10250F3L	250	305	510	520	370	15900
PBVPN10280F3L	280	341	480	870	350	21240
PBVPN10315F3L	315	382	590	870	390	26950
PBVPN10400F3L	400	465	710	1070	720	57580

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations