


POWER-LOCK bend 30° M/F PN16

Bend PVC-U, M/F, Grey RAL 7011, FORSHEDA 601 POWER-LOCK® connection.

The fittings comply with UNI EN ISO 1452, DIN 8063, ISO 2045, ISO/DIS 6455 standards for the transport of pressurised fluids for the supply of drinking water, wastewater and food fluids: oil, wine, milk.

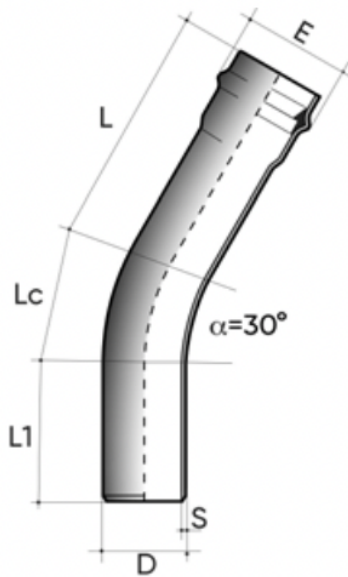

Reference	D (mm)	E (mm)	L (mm)	Lc (mm)	L1 (mm)	Weight (gr)
PBVPN16063F3L	63	86	350	280	275	1180
PBVPN16075F3L	75	102	280	280	355	1690
PBVPN16090F3L	90	120	320	340	300	2630
PBVPN16110F3L	110	144	315	295	300	2930
PBVPN16125F3L	125	161	350	340	285	4110
PBVPN16140F3L	140	178	330	375	315	5610
PBVPN16160F3L	160	202	330	435	345	7800
PBVPN16180S3L	180*	224	460	680	310	10670
PBVPN16200F3L	200	238	475	680	295	13710
PBVPN16225F3L	225	276	490	840	270	20160
PBVPN16250F3L	250	305	490	840	370	24700
PBVPN16280F3L	280	341	480	870	350	33070
PBVPN16315F3L	315	382	590	870	870	41880
PBVPN16400F3L	400	465	710	1070	720	85590

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations