


# POWER-LOCK bend 11° F/F PN10

Bend PVC-U, F/F, Grey RAL 7011, FORSHEDA 601 POWER-LOCK® connection.

The fittings comply with UNI EN ISO 1452, DIN 8063, ISO 2045, ISO/DIS 6455 standards for the transport of pressurised fluids for the supply of drinking water, wastewater and food fluids: oil, wine, milk.

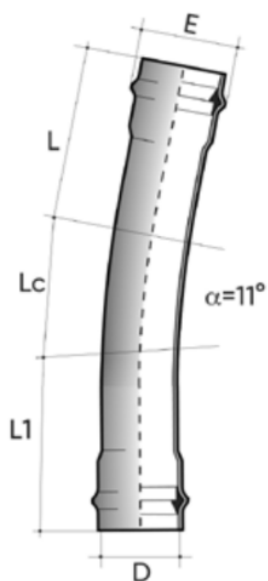

Reference	D (mm)	E (mm)	L (mm)	Lc (mm)	L1 (mm)	Weight (gr)
PBVPN10063FF1L	63	86	355	280	315	820
PBVPN10075FF1L	75	102	330	280	305	1130
PBVPN10090FF1L	90	120	300	340	330	1710
PBVPN10110FF1L	110	144	320	295	315	1980
PBVPN10125FF1L	125	161	330	340	360	2855
PBVPN10140FF1L	140	178	335	375	360	3730
PBVPN10160FF1L	160	202	340	435	380	5270
PBVPN10180SS1L	180*	224	560	280	560	9430
PBVPN10200FF1L	200	238	560	280	560	11700
PBVPN10225FF1L	225	276	545	310	545	14680
PBVPN10250FF1L	250	305	570	310	570	21000
PBVPN10280FF1L	280	341	555	340	555	23370
PBVPN10315FF1L	315	382	565	370	565	29650
PBVPN10400FF1L	400	465	750	450	800	63340

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations