


POWER-LOCK bend 11° F/F PN16

Bend PVC-U, F/F, Grey RAL 7011, FORSHEDA 601 POWER-LOCK® connection.

The fittings comply with UNI EN ISO 1452, DIN 8063, ISO 2045, ISO/DIS 6455 standards for the transport of pressurised fluids for the supply of drinking water, wastewater and food fluids: oil, wine, milk.

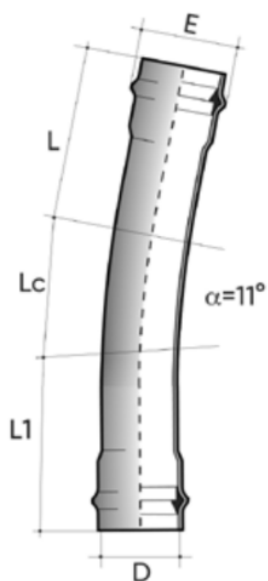

Reference	D (mm)	E (mm)	L (mm)	Lc (mm)	L1 (mm)	Weight (gr)
PBVPN16063FF1L	63	86	355	280	315	1220
PBVPN16075FF1L	75	102	330	280	305	1690
PBVPN16090FF1L	90	120	300	340	330	2610
PBVPN16110FF1L	110	144	320	295	315	3200
PBVPN16125FF1L	125	161	330	340	360	4350
PBVPN16140FF1L	140	178	335	375	360	5600
PBVPN16160FF1L	160	202	340	435	380	8160
PBVPN16180SS1L	180*	224	560	280	560	14220
PBVPN16200FF1L	200	238	560	280	560	17550
PBVPN16225FF1L	225	276	545	310	545	22240
PBVPN16250FF1L	250	305	570	310	570	31510
PBVPN16280FF1L	280	341	555	340	555	39470
PBVPN16315FF1L	315	382	565	370	565	49950

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations