


# POWER-LOCK bend 22° F/F PN10

Bend PVC-U, F/F, Grey RAL 7011, FORSHEDA 601 POWER-LOCK® connection.

The fittings comply with UNI EN ISO 1452, DIN 8063, ISO 2045, ISO/DIS 6455 standards for the transport of pressurised fluids for the supply of drinking water, wastewater and food fluids: oil, wine, milk.

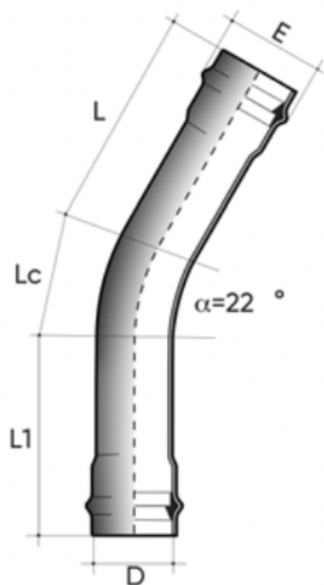

Reference	D (mm)	E (mm)	L (mm)	Lc (mm)	L1 (mm)	Weight (gr)
PBVPN10063FF2L	63	86	355	280	315	820
PBVPN10075FF2L	75	102	330	280	305	1130
PBVPN10090FF2L	90	120	300	340	330	1710
PBVPN10110FF2L	110	144	320	295	315	1980
PBVPN10125FF2L	125	161	330	340	360	2855
PBVPN10140FF2L	140	178	335	375	360	3730
PBVPN10160FF2L	160	202	340	435	380	5270
PBVPN10180SS2L	180*	224	635	330	635	9430
PBVPN10200FF2L	200	238	635	330	635	11700
PBVPN10225FF2L	225	276	545	510	545	14680
PBVPN10250FF2L	250	305	665	520	665	21000
PBVPN10280FF2L	280	341	530	590	530	23370
PBVPN10315FF2L	315	382	570	510	570	29650
PBVPN10400FF2L	400	465	660	880	660	63340

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations