


POWER-LOCK bend 22° F/F PN16

Bend PVC-U, F/F, Grey RAL 7011, FORSHEDA 601 POWER-LOCK® connection.

The fittings comply with UNI EN ISO 1452, DIN 8063, ISO 2045, ISO/DIS 6455 standards for the transport of pressurised fluids for the supply of drinking water, wastewater and food fluids: oil, wine, milk.

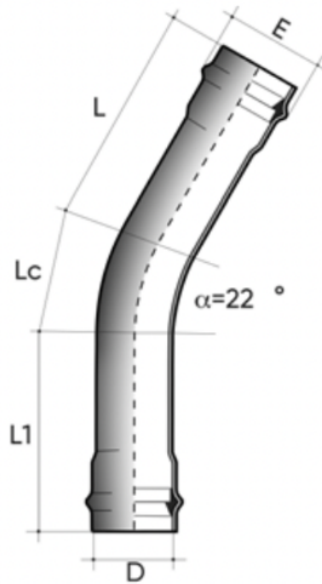

Reference	D (mm)	E (mm)	L (mm)	Lc (mm)	L1 (mm)	Weight (gr)
PBVPN16063FF2L	63	86	355	280	315	1220
PBVPN16075FF2L	75	102	330	280	305	1690
PBVPN16090FF2L	90	120	300	340	330	2610
PBVPN16110FF2L	110	144	320	295	315	3200
PBVPN16125FF2L	125	161	330	340	360	4350
PBVPN16140FF2L	140	178	335	375	360	5600
PBVPN16160FF2L	160	202	340	435	380	8160
PBVPN16180SS2L	180*	224	635	330	635	14220
PBVPN16200FF2L	200	238	635	330	635	17550
PBVPN16225FF2L	225	276	545	510	545	22240
PBVPN16250FF2L	250	305	665	520	665	31510
PBVPN16280FF2L	280	341	530	590	530	39470
PBVPN16315FF2L	315	382	570	510	570	49950

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations