


POWER-LOCK bend 45° F/F PN16

Bend PVC-U, F/F, Grey RAL 7011, FORSHEDA 601 POWER-LOCK® connection.

The fittings comply with UNI EN ISO 1452, DIN 8063, ISO 2045, ISO/DIS 6455 standards for the transport of pressurised fluids for the supply of drinking water, wastewater and food fluids: oil, wine, milk.

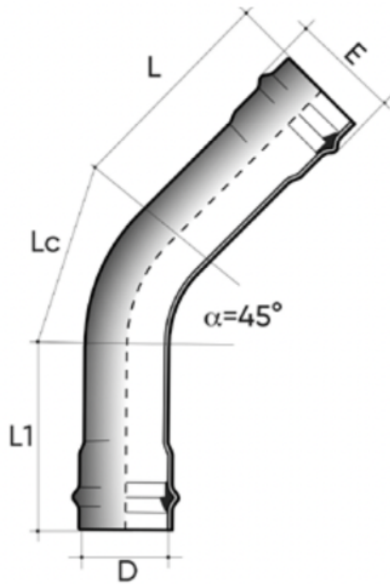

Reference	D (mm)	E (mm)	L (mm)	Lc (mm)	L1 (mm)	Weight (gr)
PBVPN16063FF4L	63	86	355	280	315	1220
PBVPN16075FF4L	75	102	330	280	305	1690
PBVPN16090FF4L	90	120	300	340	330	2610
PBVPN16110FF4L	110	144	320	295	315	3200
PBVPN16125FF4L	125	161	330	340	360	4350
PBVPN16140FF4L	140	178	335	375	360	5600
PBVPN16160FF4L	160	202	340	435	380	8160
PBVPN16180SS4L	180*	224	540	680	540	14220
PBVPN16200FF4L	200	238	550	680	540	17550
PBVPN16225FF4L	225	276	505	840	505	22240
PBVPN16250FF4L	250	305	580	840	580	31510
PBVPN16280FF4L	280	341	565	870	565	39470
PBVPN16315FF4L	315	382	615	870	615	49950

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations