


Reduced sleeve F/F PN10

Reduced sleeve PVC-U, F/F, Grey RAL 7011, Rubber ring connection, FORSHEDA 601 POWER-LOCK® on request.

The fittings comply with UNI EN ISO 1452, DIN 8063, ISO 2045, ISO/DIS 6455 standards for the transport of pressurised fluids for the supply of drinking water, wastewater and food fluids: oil, wine, milk.

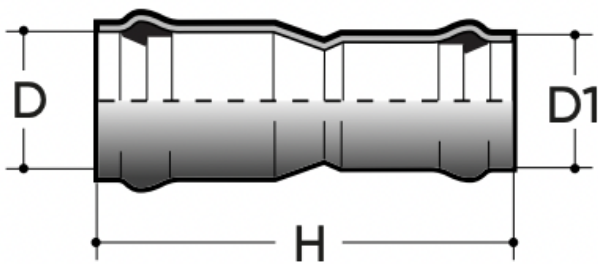

Reference	Dxd (mm)	H (mm)	Weight (gr)
MDVP05355315SSL	55x315***	1150	25840
MDVP05400355SSL	400x355***	1150	33600
MDVP08315280SSL	315x280**	1140	21190
MDVP10075063SSL	75x63	330	476
MDVP10090075SSL	90x75	340	770
MDVP10110090SSL	110x90	418	1493
MDVP10125110SSL	125x110	460	2180
MDVP10140125SSL	140x125	508	3056
MDVP10160140SSL	160x140	552	4770
MDVP10180160SSL	180x160	598	6715
MDVP10200180SSL	200x180	658	8480
MDVP10225200SSL	225x200	677	10500
MDVP10250225SSL	250x225	696	14410
MDVP10280250SSL	280x250	723	17950

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations