


Reduced sleeve F/F PN16

Reduced sleeve PVC-U, F/F, Grey RAL 7011, Rubber ring connection, FORSHEDA 601 POWER-LOCK® on request.

The fittings comply with UNI EN ISO 1452, DIN 8063, ISO 2045, ISO/DIS 6455 standards for the transport of pressurised fluids for the supply of drinking water, wastewater and food fluids: oil, wine, milk.

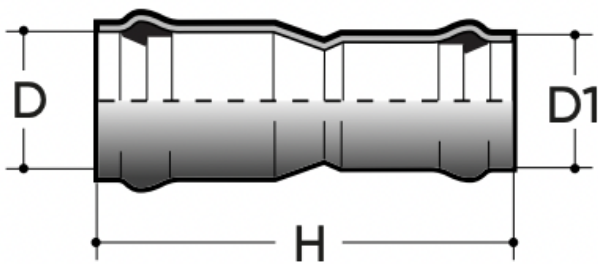

Reference	Dxd (mm)	H (mm)	Weight (gr)
MDVP16075063SSL	75x63	330	520
MDVP16090075SSL	90x75	340	970
MDVP16110090SSL	110x90	418	2000
MDVP16125110SSL	125x110	460	2450
MDVP16140125SSL	140x125	508	3835
MDVP16160140SSL	160x140	552	5670

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations