


# ATSR 45

## Reduced branch 45° (spigot fitting)

Reduced branch 45°, SDR 17 (spigot fitting) ATSR 45

- HD-PE fitting for processing without holding devices with FRIAFIT couplers AM
- Black pipe colour with bright inner surface

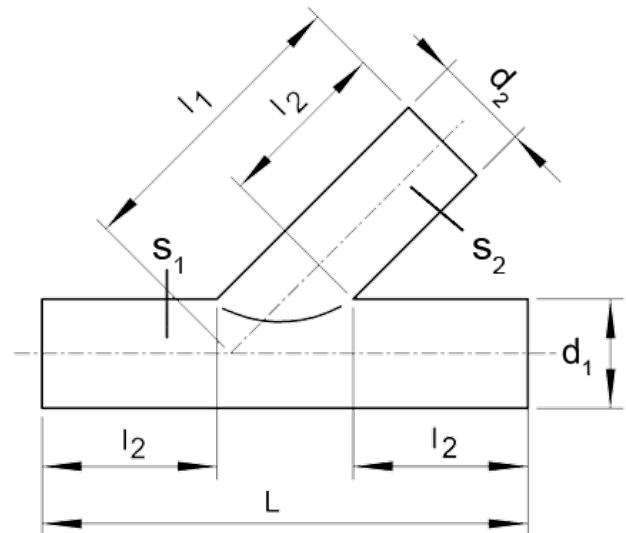

PE 100

Maximum permissible test pressure 0.5 bar according to DIN EN 1610

Reference	d <sub>1</sub>	d <sub>2</sub>	L	l <sub>1</sub>	l <sub>2</sub>	s <sub>1</sub>	s <sub>1</sub>	s <sub>2</sub>	Weight [kg]	BX
682203	225	160	726	489	250	13,4	13,4	9,5	7,500	1
682204	280	160	826	578	300	16,6	16,6	9,5	12,000	1
682205	280	225	918	610	300	16,6	16,6	13,4	15,600	1
682206	315	160	926	653	350	18,7	18,7	9,5	16,600	1
682207	315	225	1018	685	350	18,7	18,7	13,4	19,600	1
682208	355	160	926	681	350	21,1	21,1	9,5	19,600	1
682209	355	225	1018	714	350	21,1	21,1	13,4	28,500	1
682210	450	160	926	748	350	26,7	26,7	9,5	29,100	1