
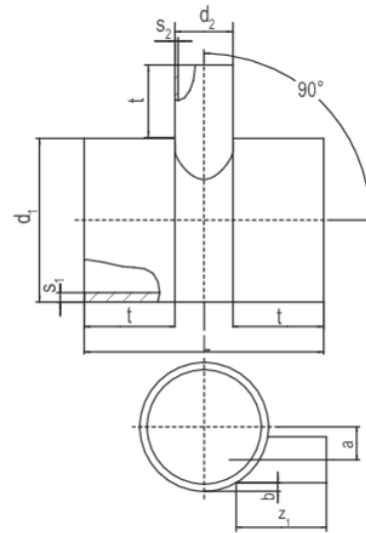


ATSRS 90

Reduced branch 90° with off-center outlet (spigot fitting)

Reduced branch 90° with off-center outlet, SDR 17 (spigot fitting) ATSRS 90

- HD-PE fitting with off-center outlet for processing without holding devices with FRIAFIT couplers AM
- Black pipe colour with bright inner surface

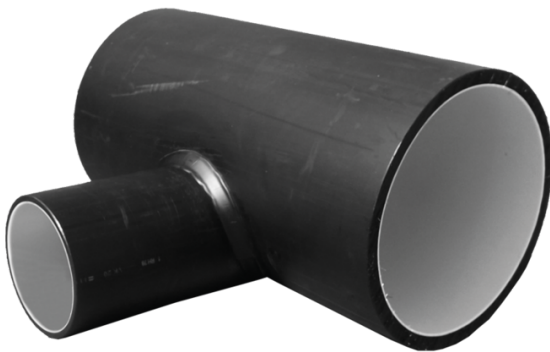

PE 100

Maximum permissible test pressure 0.5 bar according to DIN EN 1610

Reference	d ₁	d ₂	a	b	L	s ₁	s ₁	s ₂	t	z ₁	Weight [kg]	BX
682401	315	160	50	30	565	17,9	17,9	9,1	200	280	12,100	1
682402	315	225	20	25	630	17,9	17,9	12,8	200	280	15,300	1
682403	355	160	68	30	660	20,1	20,1	9,1	200	290	15,200	1
682404	355	225	40	25	730	20,1	20,1	12,8	200	290	20,700	1
682405	450	160	115	30	660	25,5	25,5	9,1	200	315	25,600	1
682406	450	225	87	25	730	25,5	25,5	12,8	200	315	30,700	1
682407	560	160	170	30	660	31,7	31,7	9,1	200	340	39,000	1
682408	560	225	142	25	730	31,7	31,7	12,8	200	340	45,300	1
682409	630	160	205	30	660	35,7	35,7	9,1	200	360	48,800	1
682410	630	225	177	25	730	35,7	35,7	12,8	200	360	56,200	1