

RES


Reducer off-center (spigot fitting)

Reducer off-center, SDR 17 (spigot fitting) RES

- HD-PE fitting for processing without holding devices with FRIAFIT couplers AM

Note:

Other dimensions on request.

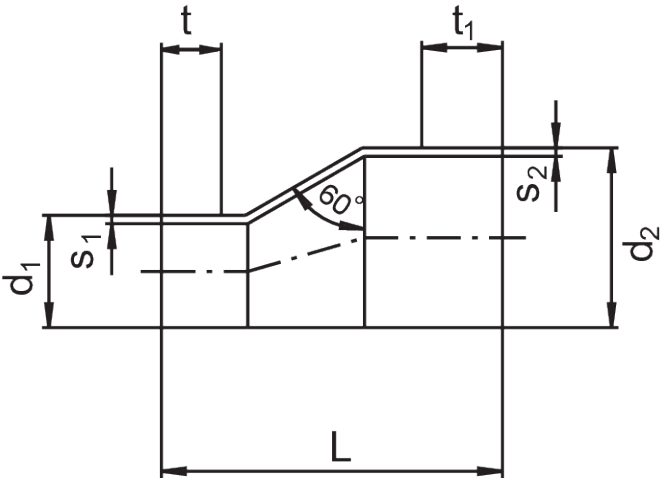

PE 100  
Maximum permissible test pressure 0.5 bar according to DIN EN 1610

| Reference | d <sub>1</sub> | d <sub>2</sub> | L   | s <sub>1</sub> | s <sub>1</sub> | s <sub>2</sub> | t   | t <sub>1</sub> | Weight [kg] | BX |
|-----------|----------------|----------------|-----|----------------|----------------|----------------|-----|----------------|-------------|----|
| 681018    | 110            | 125            | 264 | 6,6            | 6,6            | 7,4            | 85  | 85             | 0,700       | 1  |
| 681801    | 110            | 160            | 310 | 6,6            | 6,6            | 9,5            | 90  | 95             | 1,400       | 1  |
| 681802    | 160            | 225            | 404 | 9,5            | 9,5            | 13,4           | 100 | 150            | 3,200       | 1  |
| 681804    | 200            | 225            | 440 | 11,9           | 11,9           | 12,8           | 100 | 250            | 4,100       | 1  |
| 681810    | 225            | 280            | 540 | 13,4           | 13,4           | 16,6           | 150 | 250            | 11,500      | 1  |