


FEOV/RM – Butterfly valve DN 40:200

Gearbox operated butterfly valve.

The FE is a butterfly valve for shutting off or regulating flow, specifically designed for water applications and equipped with a customisable Labelling System.

- **Ergonomic multifunctional handle in HIPVC** with the option for **quick operation, graduated adjustment** in 12 positions (every 7.5°). 180° reversible mounting
- **Customisable Labelling System:** integrated module, made of a transparent protection plug customisable tag holder using the LSE set (available as accessory). **The customisation lets you identify the valve on the system** according to the specific needs
- **Drilling pattern with oval slots** that allow coupling to flanges according to numerous international standards
- **Interchangeable liner** with the dual function of forming a hydraulic seal and isolating the body from the fluid.
- One-piece top flange with PVC-U rack. Drilling according to standard ISO 5211 for direct drive:
 - DN 40 ÷ 65: F05
 - DN 80 ÷ 150: F07
 - DN 200: F10
- Disk in PVC-U with through shaft
- **Zinc plated square section steel stem completely isolated from the fluid** complying with standard ISO 5211:
 - DN 40 ÷ 65: 11 mm
 - DN 80 ÷ 100: 14 mm
 - DN 125 ÷ 150: 17 mm
 - DN 200: 22 mm
- Can also be installed as a bottom discharge valve or tank dump valve
- **Valve material compatibility** (PVC-U) with water conveyance, drinking water and other food substances according to **current regulations**
- Possibility of directly installing a gearbox or pneumatic and/or electric actuators with a standard drilling pattern according to standard ISO 5211 F05, F07, F10

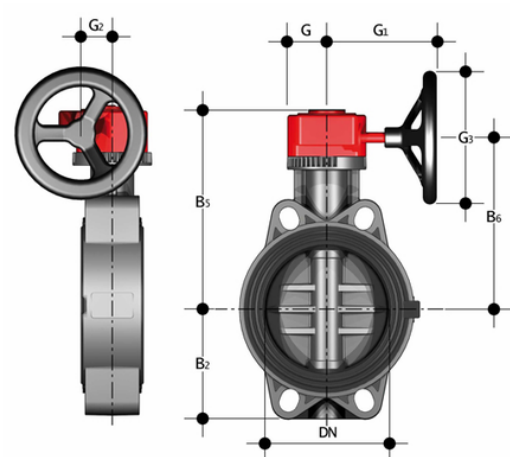

EPDM

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

FEOV/RM – Butterfly valve DN 40:200

Reference	d	DN	PN	B ₂	B ₅	B ₆	G	G ₁	G ₂	G ₃	U	g
FEOVRM075E	75 - 2"1/2	65	10	80	173	145	48	135	39	125	4	2380
FEOVRM090E	90 - 3"	80	10	90	187	159	48	135	39	125	4	2600
FEOVRM110E	110 - 4"	100	10	105	201	173	48	135	39	125	4	2950
FEOVRM140E	*140 - 5"	125	10	121	220	192	48	144	39	200	4	4400
FEOVRM160E	160 - 6"	150	10	132	235	207	48	144	39	200	4	5100
FEOVRM225E	**225 - 8"	200	10	161	288	257	65	175	60	200	8	9260

FKM

Reference	d	DN	PN	B ₂	B ₅	B ₆	G	G ₁	G ₂	G ₃	U	g
FEOVRM075F	75 - 2"1/2	65	10	80	173	145	48	135	39	125	4	2380
FEOVRM090F	90 - 3"	80	10	90	187	159	48	135	39	125	4	2600
FEOVRM110F	110 - 4"	100	10	105	201	173	48	135	39	125	4	2950
FEOVRM140F	*140 - 5"	125	10	121	220	192	48	144	39	200	4	4400
FEOVRM160F	160 - 6"	150	10	132	235	207	48	144	39	200	4	5100
FEOVRM225F	**225 - 8"	200	10	161	288	257	65	175	60	200	8	9260