

FSIV-Trogamid

Absolute pressure: 1.013 BAR AT 20°C - ISO Metric socket unions

Float: PP (Polypropylene) red


These flowmeters operate according to the variable area principle, where a float is suspended in upward flowing media in a tapered plastic tube. The vertical position of the float within the metering tube depends on the flowrate of the media. The metering tube is graduated in suitable flow units and the reading is taken in correspondence with the top edge of the float. Versions for liquids and gases are available, providing accurate and cost effective measurement with scales in l/h and Nm³/h.

- Metering tubes are available in Trogamid (PA) suitable for most inert media, PVC-U suitable for slight corrosive media and Polysulfone (PSU) suitable for corrosive media on an extended operating temperature range.
 - End connectors available in PVC-U, PVC-C, PP, SS, Malleable Cast Iron. Male threads moulded onto the end of the metering tube are used for easy mounting of unions. Standard unions are in PVC-U but others are available according to the different working conditions; Metal unions widen the range of operating conditions such as pressure and temperature.
 - The floats are available in Stainless Steel AISI 316 and in PP to match the proper chemical compatibility with the flow medium and to offer different measuring ranges.
 - Magnetic Float option is available to be combined with micro switches for MIN and MAX alarm, clamped on the guide of the flowmeter. The micro switches, housing a bistable reed contact are activated by the passage of the magnet incorporated into the float.
 - Flowmeters body are equipped with a double guide allowing the installation of two alarm in a very close position.
 - Double scale option available for specific application requirements to customize measuring units for an easy conversion or comprehension of the flow rate values.
- Wide choice of measuring scales: water scale from 1,5 to 50.000 l/h, HCl scale from 1,4 to 23.000 l/h, NaOH 30% scale from 0,25 to 43.000 l/h, NaOH 50% scale from 0,025 to 40.000 l/h, Air scale from 0,025 to 500 Nm³/h
 - Wide choice of end connections available in PVC-U, PVC-C, PP-H, AISI 316 SS, Carbon Steel
 - Eight different diameters
 - Three different plastic tube materials: PA, PVC and PSU
 - Float materials available in SS and PP, with or without magnet
 - High level of accuracy: FS accuracy class 2,5; FC accuracy class 4
 - Simple operation and very limited maintenance.
 - Other engineering units like LPM, m³/h or % together with double scales and special scales are available on request.

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

FSIV-Trogamid

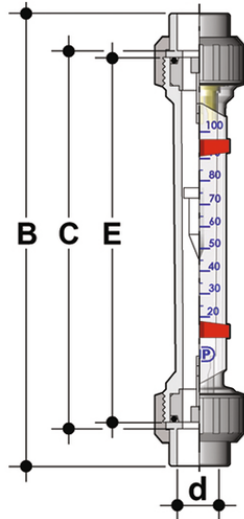

Reference	d	Flow rate range for air Nm ³ /h	B	E	C
FSIV025D0M0004	25	0,3 - 4	394	350	356
FSIV025D0M0010	25	1 - 10	394	350	356
FSIV025D0M0025	25	0,2 - 2,5	394	350	356
FSIV025D0M0065	25	0,5 - 6,5	394	350	356
FSIV032D0M0004	32	0,4 - 4	400	350	356
FSIV032D0M0010	32	1 - 10	400	350	356
FSIV032D0M0016	32	1,5 - 16	400	350	356
FSIV032D0M0065	32	0,5 - 6,5	400	350	356
FSIV040D0M0016	40	1,5 - 16	408	350	356
FSIV040D0M0025	40	2 - 25	408	350	356
FSIV040D0M0040	40	4 - 40	408	350	356
FSIV050D0M0025	50	2 - 25	418	350	356
FSIV050D0M0040	50	4 - 40	418	350	356
FSIV050D0M0050	50	5 - 50	418	350	356
FSIV063D0M0040	63	4 - 40	432	350	356
FSIV063D0M0064	63	6 - 64	432	350	356
FSIV063D0M0100	63	10 - 100	432	350	356
FSIV075D0M0140	75	15 - 140	444	350	356
FSIV075D0M0200	75	20 - 200	444	350	356
FSIV075D0M0500	75	50 - 500	444	350	356

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations