


FCIV-PVC-T+magnet

Liquid density: 1kg/l 20 °C - ISO Metric socket unions
 Float: AISI 316 Stainless Steel + Magnet

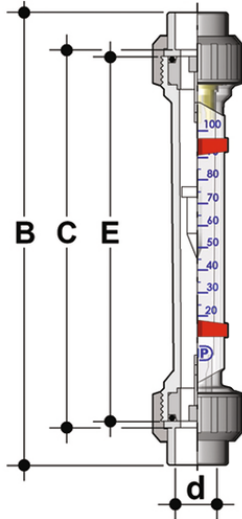

Reference	D	Flow rate range for H[5:2]O [l/h]	B	E	C
FCIV016T1X0030M	16	3 - 30	199	165	171
FCIV016T1X0040M	16	4 - 40	199	165	171
FCIV016T1X0100M	16	10 - 100	199	165	171
FCIV016T1X0200M	16	20 - 200	199	165	171
FCIV016T1X0300M	16	30 - 300	199	165	171
FCIV020T1X0050M	20	5 - 50	208	170	176
FCIV020T1X0100M	20	10 - 100	208	170	176
FCIV020T1X0160M	20	15 - 160	208	170	176
FCIV020T1X0250M	20	20 - 250	208	170	176
FCIV020T1X0350M	20	35 - 350	208	170	176
FCIV020T1X0600M	20	60 - 600	208	170	176
FCIV025T1X0150M	25	15 - 150	229	185	191
FCIV025T1X0250M	25	25 - 250	229	185	191
FCIV025T1X0400M	25	40 - 400	229	185	191
FCIV025T1X0600M	25	50 - 600	229	185	191
FCIV025T1X1100M	25	100 - 1100	229	185	191
FCIV032T1X0400M	32	40 - 400	250	200	206
FCIV032T1X0600M	32	50 - 600	250	200	206
FCIV032T1X1000M	32	100 - 1000	250	200	206
FCIV032T1X1500M	32	150 - 1500	250	200	206

All information subject to change.

Please contact us on <https://www.aliasis.co.uk/get-in-touch> for further informations