


FCFV-Polysulfone+magnet

Liquid density: 1kg/l 20 °C - BSP socket threaded unions
 Float: AISI 316 Stainless Steel + Magnet

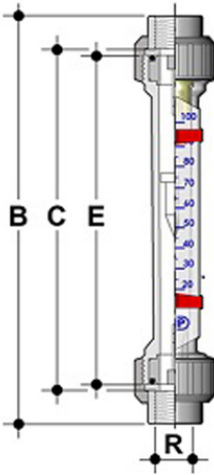

Reference	R	Flow rate range for H[5:2]O [l/h]	B	E	C
FCFV012P1X0050M	1/2"	5 - 50	212	176	170
FCFV012P1X0100M	1/2"	10 - 100	212	176	170
FCFV012P1X0160M	1/2"	15 - 160	212	176	170
FCFV012P1X0250M	1/2"	20 - 250	212	176	170
FCFV012P1X0350M	1/2"	35 - 350	212	176	170
FCFV012P1X0600M	1/2"	60 - 600	212	176	170
FCFV034P1X0150M	3/4"	15 - 150	232	191	185
FCFV034P1X0250M	3/4"	25 - 250	232	191	185
FCFV034P1X0400M	3/4"	40 - 400	232	191	185
FCFV034P1X0600M	3/4"	50 - 600	232	191	185
FCFV034P1X1100M	3/4"	100 - 1100	232	191	185
FCFV038P1X0030M	3/8"	3 - 30	198	171	165
FCFV038P1X0040M	3/8"	4 - 40	198	171	165
FCFV038P1X0100M	3/8"	10 - 100	198	171	165
FCFV038P1X0200M	3/8"	20 - 200	198	171	165
FCFV038P1X0300M	3/8"	30 - 300	198	171	165
FCFV100P1X0400M	1"	40 - 400	251	206	200
FCFV100P1X0600M	1"	50 - 600	251	206	200
FCFV100P1X1000M	1"	100 - 1000	251	206	200
FCFV100P1X1500M	1"	150 - 1500	251	206	200

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations