


QRV

Solvent weld fittings - stubs.

Serrated face stub PN 10/16 with solvent weld socket, for use with stubs QPV/QRV and flat gasket (for gasket sizes, see QHV).

Series of fittings designed for conveying fluids under pressure with a cold chemical weld jointing system (solvent welding) using a suitable solvent cement and cleaner-primer.

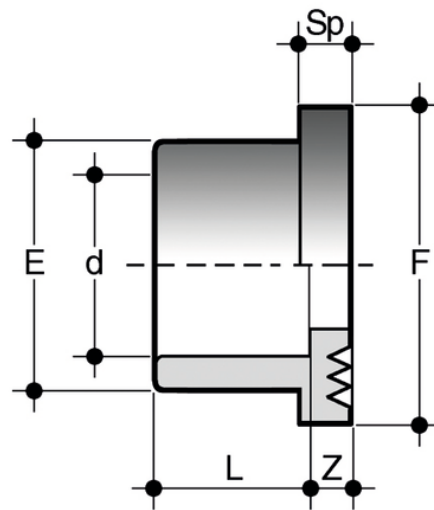

Reference		d	DN	PN	E	F	L	Sp	Z	g
QRV040	I	40	32	16	50	61	26	8	3	40
QRV050	I	50	40	16	61	73	31	8	3	62
QRV063	I	63	50	16	76	90	38	9	3	105
QRV075	I	75	65	16	90	105	44	10	3	160
QRV090	I	90	80	16	108	125	51	10	5	275
QRV110	I	110	100	16	131	150	61	12	4	445
QRV125	I	125	125	16	147	168	69	13	5	750
QRV140	I	140	125	16	165	188	76	14	5	790
QRV160	I	160	150	16	188	212	86	16	4,5	1140
QRV200	I	200	200	16	230	254	106	18	5,5	1840
QRV225	I	225	200	16	245	273	119	25	5,5	1750
QRV250		250	250	10	270	306	131	20	8,5	2140
QRV280		280	250	10	307	327	147	32	14,5	3650
QRV315		315	300	10	346	377	165	32	13	4950
QRV355		*355	350	5	386	413	184	29	8	5400
QRV400		*400	400	5	430	483	206	26	12	6500
QRV450		*450	450	4	486	538	-	19	8	5200

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations



QRV

Reference	d	DN	PN	E	F	L	Sp	Z	g
QRV500	*500	500	4	532	574	-	18	-	3000

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations

