

DIMV

Adaptor fittings.

Double adaptor with solvent weld socket df , solvent weld spigot dm and BSP threaded female end R with stainless steel reinforcing ring (fig. B).

Series of fittings designed for conveying fluids under pressure with threaded and solvent weld cold chemical jointing systems (solvent welding) using suitable solvent cement and cleaner/primer.

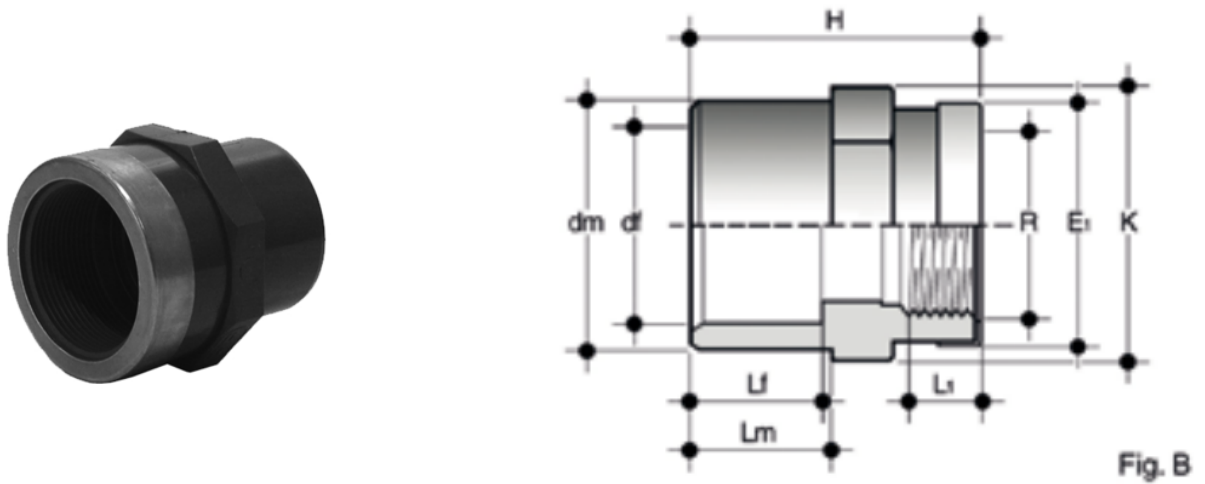


Fig. B

Reference	$dm \times df \times R$	PN	E	E_1	H	K	L_1	L_f	L_m	g
DIMV020016012	20 x 16 x 1/2"	16	-	29,5	40	30	15	14	16	21
DIMV025020034	25 x 20 x 3/4"	16	-	36	46	36	16,3	16	19	34
DIMV032025100	32 x 25 x 1"	16	-	44	52	46	19,1	19	22	58
DIMV040032114	40 x 32 x 1 1/4"	16	-	55	63	54	21,4	22	26	85
DIMV050040112	50 x 40 x 1 1/2"	16	-	62	73	65	21,4	26	31	141
DIMV063050200	63 x 50 x 2"	16	-	77	87	80	25,7	31	38	212
DIMV075063200	75 x 63 x 2"	16	-	77	77	76	25,7	38	44	202

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations