


DIFV

Adaptor fittings.

Double adaptor with solvent weld socket df, solvent weld spigot dm and BSP threaded female end R (fig. A).

Series of fittings designed for conveying fluids under pressure with threaded and solvent weld cold chemical jointing systems (solvent welding) using suitable solvent cement and cleanerprimer.

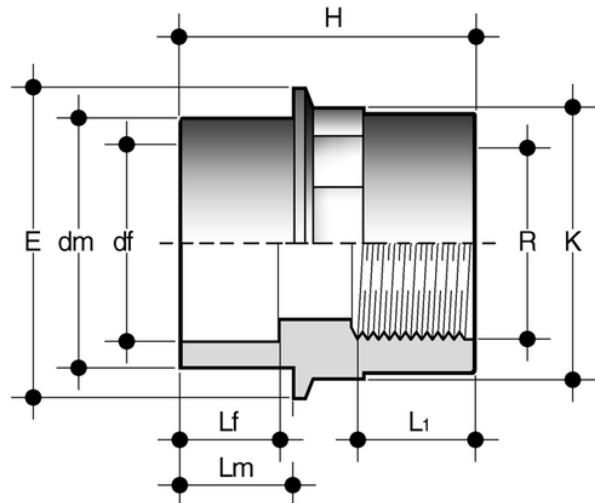

Reference	dm x df x R	PN	E	H	K	L ₁	L _f	L _m	g
DIFV020016038	20 x 16 x 3/8"	16	28	36	24	11,4	14	16	11
DIFV025020012	25 x 20 x 1/2"	16	34	42	29	15	16	19	17
DIFV032025034	32 x 25 x 3/4"	16	40	49	35	16,3	19	22	26
DIFV040032100	40 x 32 x 1"	16	52	57	44	19,1	22	26	49
DIFV050040114	50 x 40 x 1"1/4	16	59	67	54	21,4	26	31	66
DIFV063050112	63 x 50 x 1"1/2	16	70	77	64	21,4	31	38	129

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations