


QRC

Solvent weld fittings - stubs.

Stub with serrated face according to DIN 8063 PN 10/16 with solvent weld socket, for use with flat gasket (for gasket sizes, see QHV).

Series of fittings designed for conveying fluids under pressure with a cold chemical weld joining system (solvent welding) using a suitable solvent cement (TemperGLUE WELD-ON) and cleaner-primer.

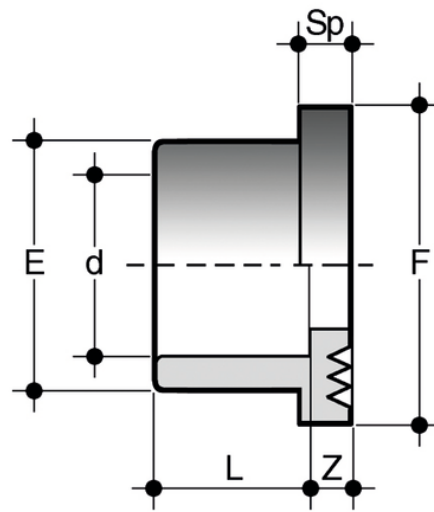

Reference	d	DN	PN	E	F	L	Sp	Z	g
QRC020	20	15	16	27	34	16	7	3.5	11
QRC025	25	20	16	33	41	19	7	3	17
QRC032	32	25	16	41	50	22	7	3	27
QRC040	40	32	16	50	61	26	8	3	43
QRC050	50	40	16	61	73	31	8	3	66
QRC063	63	50	16	76	90	38	9	3	116
QRC075	75	65	16	90	103	44	10	3	175
QRC090	90	80	16	108	125	51	10	5	305
QRC110	110	100	16	131	150	61	12	4	490
QRC160	160	150	16	188	212	86	16	4,5	1240
QRC225	225	200	10	245	273	119	25	5,5	1750

All information subject to change.

Please contact us on <https://www.aliaxis.co.uk/get-in-touch> for further informations