

VAM RG TL

Top loading tapping saddle with female threaded gunmetal outlet

Top loading tapping saddle with female threaded gunmetal outlet VAM RG TL

- Gas, water
- Working pressure: MOP (gas) 10 bar, PFA (water) 16 bar
- Material: PE 100-RC and gunmetal (female thread)
 - Universal clamping option (top loading):
 - Safe clamping with FRIATOP
- Safety technology
- Metals in contact with water according to UBA (Federal Environment Agency, Germany) recommendation


Note:

Can only be used with the clamping device FRIATOP (Order No. 613350).

For accommodating commercially available brass valves.

Dimension range d 250 - d 560 can be fused as standard in the top loading process.

As a complete solution, we recommend our DAV tapping valve.

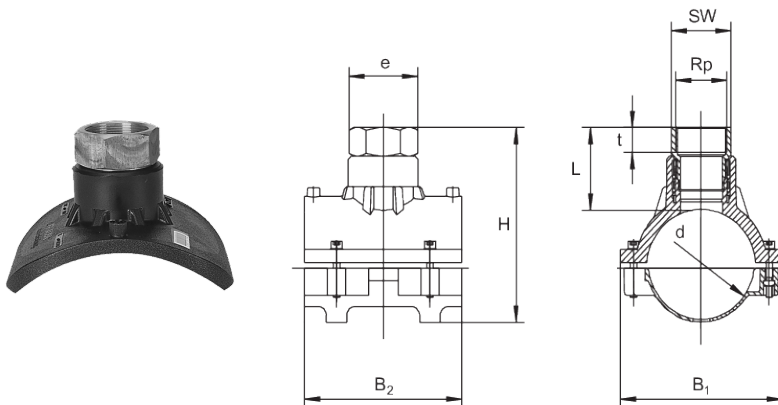

PE 100-RC SDR 11

Maximum permissible working pressure 16 bar (water) / 10 bar (gas)



Reference	Diameter	Rp	B	L	t	Weight [kg]	BX	Pallet quantity
615470	250 - 560	2"	200	90	27	1,510	8	144