

DAA

Tapping tee RED SNAP, SDR 11

Tapping tee DAA SDR 11

- Gas, water and H2
- Working pressure: MOP (gas) 10 bar, PFA (water) 16 bar
- Material: PE 100-RC
- Quick release mechanism (RED SNAP):
 - Simple and error-free assembly
 - Increased quality and safety
 - Save 50% of installation time
- Integrated drill with upper and lower inner stop
- Sealing plug with internal sealing O-ring
- Safety technology
- DVGW test mark: DV-6611CS0007

Note:



As a precautionary measure, we recommend additionally using a DK cap for all new DAA installations.

The operating key FWSS SW 17 (Order no. 613246) must be used for all dimensions.

All outlets (d2) with nominal widths 40 and 50 are always solutions with a reducing sleeve MR.

Outlet pressure test:

A special pressure test adapter FWDPA for DAA RED SNAP (Order no. 613597) must be used.

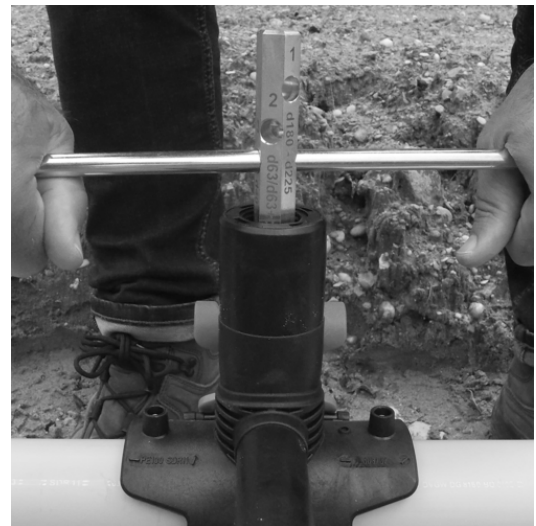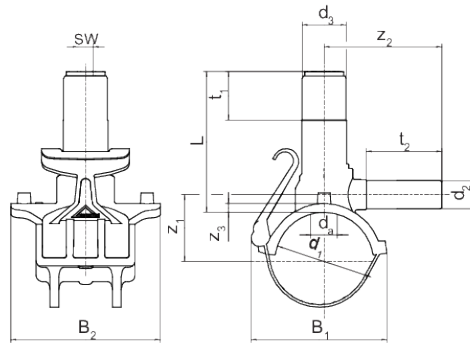

PE 100-RC SDR 11

Maximum permissible working pressure 16 bar (water) / 10 bar (gas)



Reference	d ₁	d ₂	B1	B2	D1	d ₃	L	t ₁	t ₂	z ₁	z ₂	z ₃	Drilling Ø da	SW	Weight [kg]	BX	Pallet quantity
612630	40	20	85	136	40	50	120	50	66	32	105	8	25	17	0,380	36	240
616473	40	25	85	136	40	50	120	50	83	32	122	8	25	17	0,380	36	240
616474	40	32	85	136	40	50	120	50	86	32	125	8	25	17	0,390	36	240

Tapping tee RED SNAP, SDR 11

Reference	d ₁	d ₂	B1	B2	D1	d ₃	L	t ₁	t ₂	z ₁	z ₂	z ₃	Drilling Ø da	SW	Weight [kg]	BX	Pallet quantity
616475	50	20	95	136	50	50	120	50	66	37	108	8	25	17	0,380	32	224
612702	50	25	95	136	50	50	120	50	83	37	125	8	25	17	0,390	32	224
615080	50	32	95	136	50	50	120	50	86	37	128	8	25	17	0,400	32	224
612631	63	20	108	146	63	50	130	50	66	51	100	10	25	17	0,440	22	160
612633	63	25	108	146	63	50	130	50	83	51	118	10	25	17	0,450	22	160
612632	63	32	108	146	63	50	130	50	86	51	123	10	25	17	0,460	22	160
616472	63	40	108	146	63	50	160	50	115	51	165	10	30	17	0,860	16	128
616334	63	63	108	146	63	50	160	50	115	51	165	10	30	17	0,640	16	128
616482	75	32	120	146	75	50	130	50	86	57	126	10	25	17	0,480	26	192
616483	90	20	137	170	90	50	160	50	66	66	106	10	30	17	0,610	14	112
616484	90	25	137	170	90	50	160	50	83	66	123	10	30	17	0,620	14	112
612634	90	32	137	170	90	50	160	50	86	66	126	10	30	17	0,630	14	112
615656	90	40	137	170	90	50	160	50	115	66	168	10	30	17	0,970	14	112
616476	90	50	137	170	90	50	160	50	115	66	168	10	30	17	0,990	14	112
612701	90	63	137	170	90	50	160	50	115	66	168	10	30	17	0,750	14	112
616487	110	20	152	170	110	50	160	50	66	76	111	10	30	17	0,620	14	112
616488	110	25	152	170	110	50	160	50	83	76	128	10	30	17	0,630	14	112
612637	110	32	152	170	110	50	160	50	86	76	134	10	30	17	0,650	14	112
615662	110	40	152	170	110	50	160	50	115	76	175	10	30	17	0,980	14	112
616477	110	50	152	170	110	50	160	50	115	76	175	10	30	17	0,990	14	112
612624	110	63	152	170	110	50	160	50	115	76	175	10	30	17	0,770	14	112
616491	125	20	167	170	125	50	160	50	66	83	111	10	30	17	0,650	12	96
616492	125	25	167	170	125	50	160	50	83	83	131	10	30	17	0,670	12	96
612649	125	32	167	170	125	50	160	50	86	83	138	10	30	17	0,670	12	96
615668	125	40	167	170	125	50	160	50	115	83	180	10	30	17	1,030	12	96
616478	125	50	167	170	125	50	160	50	115	83	180	10	30	17	1,120	12	96
612309	125	63	167	170	125	50	160	50	115	83	180	10	30	17	0,820	12	96
616495	140	32	170	170	140	50	160	50	86	91	141	10	30	17	0,710	12	96
616496	140	63	170	170	140	50	160	50	115	91	185	10	30	17	0,830	12	96
616497	160	20	195	186	160	50	160	50	66	106	108	10	30	17	0,750	10	80
616498	160	25	195	186	160	50	160	50	83	106	128	10	30	17	0,750	10	80
612641	160	32	195	186	160	50	160	50	86	106	137	10	30	17	0,760	10	80
615675	160	40	195	186	160	50	160	50	115	106	185	10	30	17	1,130	10	80
616480	160	50	195	186	160	50	160	50	115	106	185	10	30	17	1,130	10	80
612650	160	63	195	186	160	50	160	50	115	106	185	10	30	17	0,910	10	80
616501	180	20	203	186	180	50	190	50	66	116	110	10	30	17	0,790	10	80

DAA

Tapping tee RED SNAP, SDR 11

Reference	d ₁	d ₂	B1	B2	D1	d ₃	L	t ₁	t ₂	z ₁	z ₂	z ₃	Drilling Ø da	SW	Weight [kg]	BX	Pallet quantity
616502	180	25	203	186	180	50	190	50	83	116	132	10	30	17	0,800	10	80
612651	180	32	203	186	180	50	190	50	86	116	141	10	30	17	0,820	10	80
616481	180	50	203	186	180	50	190	50	115	116	188	10	30	17	1,180	10	80
612652	180	63	203	186	180	50	190	50	115	116	188	10	30	17	0,950	10	80
612654	200	32	205	186	200	50	190	50	86	126	144	10	30	17	0,820	8	64
612659	200	63	205	186	200	50	190	50	115	126	190	10	30	17	0,950	8	64
612657	225	32	214	186	225	50	190	50	86	138	146	10	30	17	0,830	8	64
616486	225	50	214	186	225	50	190	50	115	138	197	10	30	17	1,210	8	64
612655	225	63	214	186	225	50	190	50	115	138	197	10	30	17	0,990	8	64

Tapping tee RED SNAP, SDR 11

Areas of Application

The FRIALEN Pressure Tapping Tees DAA are used as branch fittings and can be fused to mains that are unpressurised or under operating pressure.

FRIALEN pressure tapping tees d 40 can be utilised for pipes of the SDR level 11 and \geq d 50 for pipes of the SDR levels 11 to 17.6. Other levels of SDR can be processed on request. Please note the mandatory labels directly on the product.

DVGW test mark issued: DV-6611CS0007

Assembly Instructions

The fusion of FRIALEN Pressure Tapping Tee DAA to the PE-HD main and the service pipe takes place by FRIALEN fusing - leakproof and longitudinally strong.

The pipe, saddle and the outlet spigot are prepared (oxide layer removed/cleaned) in accordance with the general installation instructions (see "Assembly instructions" for FRIALEN Safety Fittings for house connections and distribution pipes up to d 225).

Thanks to its innovative and patented clamping mechanism, the FRIALEN Pressure Tapping Tee DAA can also be installed without any tool quickly and reliably on the HD-PE main when it exhibits ovality or has expanded under operating pressure.

Good reasons for using the FRIALEN Pressure Tapping Tees DAA:

- Compact design
- Simple and reliable assembly without any tool thanks to the patented fast clamping lever
- The flexible saddle compensates pipe tolerances and always provides optimal, uniform buildup of melt pressure during fusion
- Assembly without special tools
- The Pressure Tapping Tee is one unit with captive parts
- Only one 17 mm wrench size for tapping and installing the plug
- Chipless tapping
- Leak-free tapping under operating pressure
- Low torque needed for tapping
- Punched-out pipe piece fits securely in the drill
- Stable thread as guidance for the driller during tapping process even at large pipe wall thicknesses and low temperatures
- Solid upper and lower stop of driller, with integrated torque limiter
- Extra wide fusion zone
- After tapping, stack can be fused non-accessible with FRIALEN cap K
- Outlet spigot length measured for two fusion operations
- Additional barcode for traceability (traceability coding)
- Both barcodes exposed on fast clamping lever for easy scanning with readerwand or barcode scanner