


# FBS

## Installation kit for FRIALOC PE shut-off valves

Installation kit FBS for FRIALOC

- To operate the FRIALOC from the road cap downwards
- ClickFix (tool-free)
- Wrench size SW 30 (30 mm)
- Telescopic bar:
  - Length fitting
  - Continuously adjustable (without tools)
- Self-supporting
- Corrosion protected (actuating element and coupling sleeve made of hot-dip galvanised cast steel, linkage made of hot-dip galvanised steel)

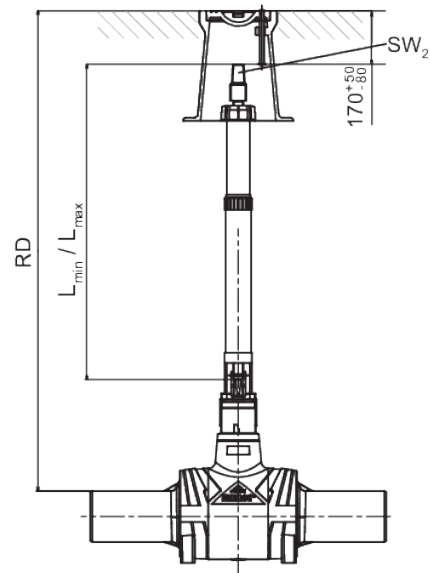

Steel linkage, hot-dipped galvanised

Reference	RD [m]	L	SW2	Weight [kg]	BX	Pallet quantity
616308	0,75 - 1,0	0,397 - 0,571 m	30	1,900	1	42
616309	0,9 - 1,3	0,552 - 0,881 m	30	2,200	1	42
616310	1,2 - 1,8	0,817 - 1,441 m	30	3,000	1	42
616318	1,5 - 2,3	1,035 - 1,847 m	30	3,850	1	42

## FBS

# Installation kit for FRIALOC PE shut-off valves

### Area of application

Telescopic activation bar to operate the FRIALOC PE shut-off valve from the street cap.

### Assembly instructions

Before fusion, the FRIALOC PE shut-off valve must be aligned corresponding to the planned actuation to guarantee a correct positioning of the FRIALOC installation kit (FBS).

### Good reasons for the installation kit FBS for FRIALOC PE shut-off valves:

- easy and safe installation thanks to KlickFix® system
- protective pipe of polyethylene protects from intrusion of sand or soil
- pull tight connection between FRIALOC and protective pipe: solid and dirt-proof
- assembly without tools
- self-supporting in all telescopic positions
- safe from being pulled out
- corrosion-protected
- telescopic installation kit can also be adjusted even once in place and filled
- constructive harmonizing of the transferable torque onto the FRIALOC PE shut-off valve
- Connexion pins made of stainless steel