


ODBC - Bride série ISO-DIN

Bride aveugle en acier revêtu de PP/FRP EN/ISO/DIN. Perçage : PN 10/16

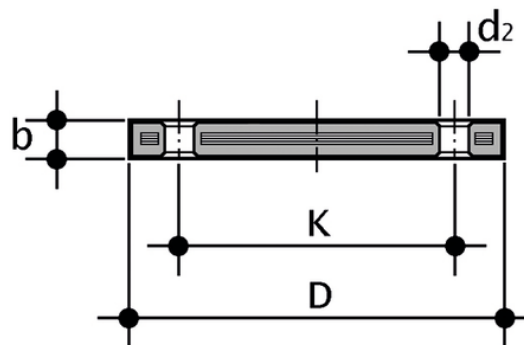

Référence	product.detail.attribute.d	DN	product.detail.attribute.PMA (bar)	product.detail.attribute.b	product.detail.attribute.d[5:2]	product.
ODBC020	20	15	10	16	14	95
ODBC025	25	20	10	12	18	105
ODBC032	32	25	10	18	14	115
ODBC040	40	32	10	17	18	140
ODBC050	50	40	10	18	18	150
ODBC063	63	50	10	18	18	165
ODBC075	75	65	10	18	18	185
ODBC090	90	80	10	20	18	200
ODBC110	110	100	10	20	18	220