


VKDOM/CE 90-240 V AC - Valvola a sfera a 2 vie DUAL BLOCK® a comando elettrico DN 10:50

Valvola a sfera DUAL BLOCK® con flange fisse EN/ISO/DIN PN 10/16, scartamento secondo EN 558-1 con attuatore elettrico multivolt 90-240 V AC 50-60 Hz.

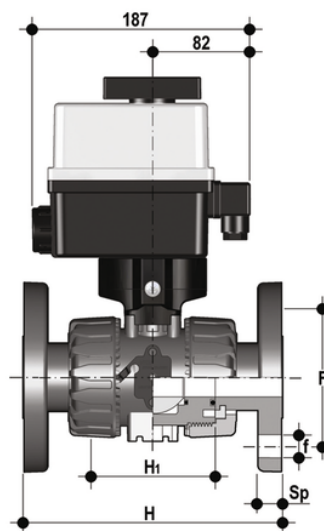

EPDM

Codice	d	DN	PN	H	H	F	f	U	Sp	g
VKDOMEM020E	20	15	10	130	65	65	14	4	11	1715
VKDOMEM025E	25	20	10	150	70	75	14	4	13,5	1791
VKDOMEM032E	32	25	10	160	78	85	14	4	14	1871
VKDOMEM040E	40	32	10	180	88	100	18	4	14	2156
VKDOMEM050E	50	40	10	200	93	110	18	4	16	2358
VKDOMEM063E	63	50	10	230	111	125	18	4	16	2807

FKM

Codice	d	DN	PN	H	H	F	f	U	Sp	g
VKDOMEM020F	20	15	10	130	65	65	14	4	11	1715
VKDOMEM025F	25	20	10	150	70	75	14	4	13,5	1791
VKDOMEM032F	32	25	10	160	78	85	14	4	14	1871
VKDOMEM040F	40	32	10	180	88	100	18	4	14	2156
VKDOMEM050F	50	40	10	200	93	110	18	4	16	2358
VKDOMEM063F	63	50	10	230	111	125	18	4	16	2807